



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

An Ultra-Compact Marx-Type High-Voltage Generator

*D. Goertz, T. Ferriera, D. Nelson, R. Speer, M.
Wilson*

June 15, 2001

2001 Institute of Electrical and Electronics Engineers, Inc
Pulsed Power and Plasma Science Conference, Las Vegas,
NV., June 17-22, 2001

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This work was performed under the auspices of the U.S. Department of Energy by University of California, Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

AN ULTRA-COMPACT MARX-TYPE HIGH-VOLTAGE GENERATOR*

D. Goerz, T. Ferriera, D. Nelson, R. Speer, M. Wilson

Lawrence Livermore National Laboratory

P.O. Box 808, Mail Stop L-153

Livermore, CA 94550 USA

Abstract

This paper discusses the design of an ultra-compact, Marx-type, high-voltage generator. This system incorporates high-performance components that are closely coupled and integrated into an extremely compact assembly. Low profile, custom ceramic capacitors with coplanar extended electrodes provide primary energy storage. Low-inductance, spark-gap switches incorporate miniature gas cavities imbedded within the central region of the annular shaped capacitors, with very thin dielectric sections separating the energy storage capacitors. Carefully shaped electrodes and insulator surfaces are used throughout to minimize field enhancements, reduce fields at triple-point regions, and enable operation at stress levels closer to the intrinsic breakdown limits of the dielectric materials. Specially shaped resistors and inductors are used for charging and isolation during operation. Forward-coupling ceramic capacitors are connected across successive switch-capacitor-switch stages to assist in switching. Pressurized SF₆ gas is used for electrical insulation in the spark-gap switches and throughout the unit. The pressure housing is constructed entirely of dielectric materials, with segments that interlock with the low-profile switch bodies to provide an integrated support structure for all of the components. This ultra-compact Marx generator employs a modular design that can be sized as needed for a particular

application. Units have been assembled with 4, 10, and 30 stages and operated at levels up to 100 kV per stage.

I. INTRODUCTION

Marx generators are frequently used in many pulsed power applications. Usually, they are employed to energize pulse forming sections that can deliver greater peak power to lower impedance loads than the Marx can itself. Most often, these Marx units are constructed with standard, commercially available components, arranged as compactly as possible.

For certain applications, Marx generators can be used to directly power some apparatus or device. For these applications, overall system performance can be significantly improved by employing an ultra-compact Marx generator comprised of specially shaped components assembled into an integrated package. We have developed such devices for various applications.

II. DESCRIPTION

The ultra-compact Marx is depicted in Figure 1. It is a sophisticated electrical device and elaborate mechanical assembly [1].

Each energy storage capacitor assembly is made up of

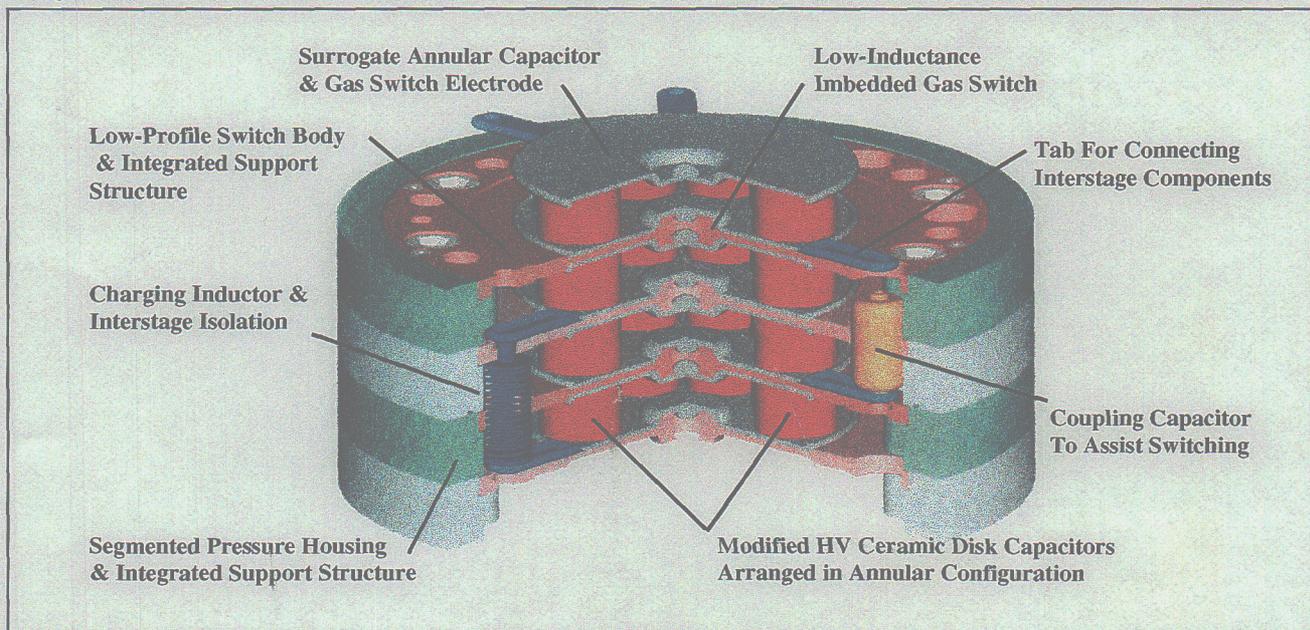


Figure 1. Cutaway-view drawing of the ultra-compact Marx showing key components and integrated packaging.

* Work performed under the auspices of the U. S. Department of Energy by the Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

eight remanufactured disk capacitors arranged in an annular configuration. The 440-pF, 40-kV, N4700-type disk capacitors are modified as shown in Figure 2 to a final height of 1.7 cm. Then they are assembled between extended coplanar electrodes that help maintain uniform

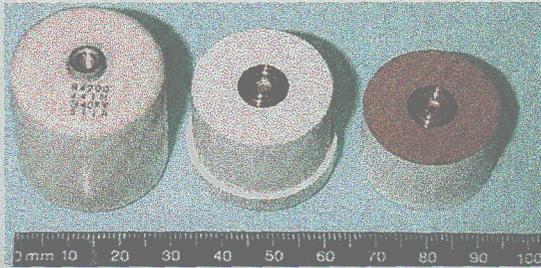


Figure 2. Modifications to commercial disk capacitors.

fields at the triple point regions. Each capacitor assembly is tested to 120 kV in SF₆ before usage. At the elevated operating level of 100 kV, the electrical stress in the ceramic substrate is 60 kV/cm and the effective capacitance is reduced to about 65 percent of normal [2].

The surrogate annular capacitor electrodes also serve as the gas switch electrodes. They are precisely machined to the same shape as the dielectric switch body. Figure 3 shows how the capacitor and switch become an integral unit. The main portion of the switch body that separates the adjacent surrogate annular caps is only 2-mm thick for charge levels as high as 100 kV.



Figure 3. Cutaway view of switch body positioned on top of mating electrode of surrogate annular cap.

In the central region of the annular cap assembly, a recessed area is formed where the miniature spark gap switch is imbedded. The switch is comprised of raised button electrodes formed on the annular capacitors that protrude into the gas cavity within the dielectric switch body. The cavity wall is contoured to reduce the electric field at the triple points. SF₆ gas has been used to achieve the highest operating levels. Figure 4 shows the operating curve of a typical gas switch having a 2.43-mm gap [3,4].

For such a compact Marx, even the arrangement of charging components becomes difficult. We elected to use a bipolar charging configuration with +50kV and -50kV power supplies connected through coaxial cables to linear strings of custom charging components.

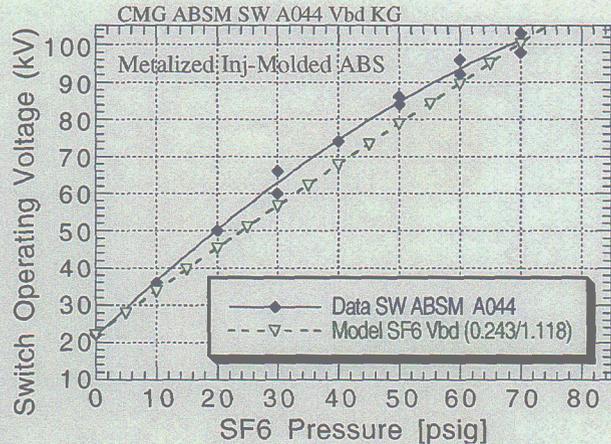


Figure 4. Operating curve of miniature gas switch.

Both resistors and inductors were developed for charging the ultra-compact Marx and providing interstage isolation during operation. Figure 5 shows both types of components. Each is capable of withstanding the 200-kV impulses over their nominal 3-cm length when operated in a pressurized SF₆ environment. Figure 6 shows the arrangement of the resistors in the Marx along with the tabs used to connect to the sides of the energy storage capacitors.




Figure 5. Charging inductor and resistor.

Also shown in Figure 6 is the arrangement of feed-forward coupling capacitors. Ordinarily, in conventional Marx generators, the switch capacitance is low enough that stray stage-to-housing capacitance is adequate to couple enough voltage across adjacent switches to cause them to operate. However, in an ultra-compact Marx generator the extremely low-profile switch has such high capacitance

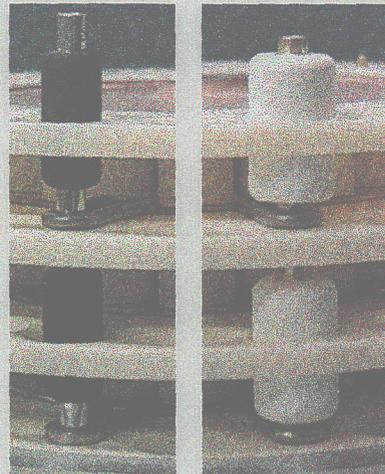


Figure 6. Arrangement of charging resistors (left) and interstage coupling capacitors (right).

that stray coupling is not sufficient. This shortcoming can be overcome by incorporating discrete coupling capacitors connected across stages. In the arrangement shown, the capacitors have no voltage across them when the Marx is charged, but see transient voltages up to 200 kV when the Marx operates. We used commercially available 140-pF 40-kV encapsulated ceramic capacitors, machined somewhat to adjust length and radius edges.

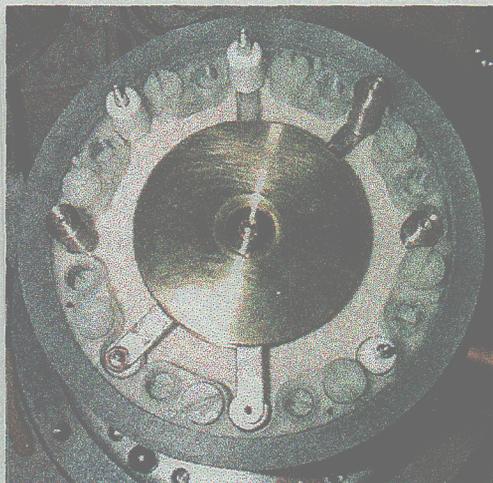


Figure 7a. Intermediate assembly step.

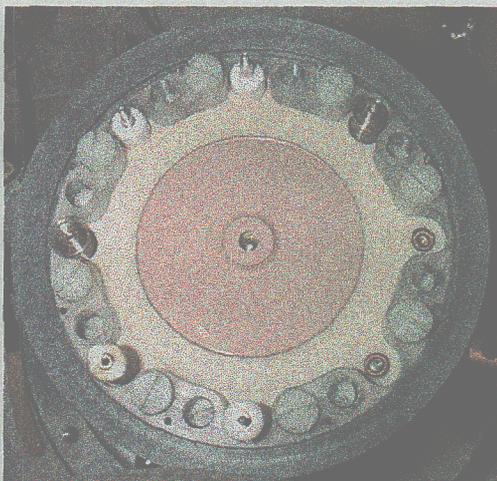


Figure 7b. Next sequential assembly step.

Assembly of the ultra-compact Marx is a process of stacking adjoining components and interlocking them with sections of a segmented pressure housing. Figures 7a and 7b show two sequential assembly steps.

III. TEST RESULTS

Prototype units of various sizes have been built and tested. The largest to date is a 30-stage unit that is 75-cm long. Figure 8 shows an open shutter photo taken during a test. The pattern of illumination at each stage is caused by light from each spark gap channeling through the clear

dielectric switch body and backlighting the outboard components. The load is comprised of eight 400-ohm liquid resistors running alongside the unit.

As designed, operation of any single switch should be

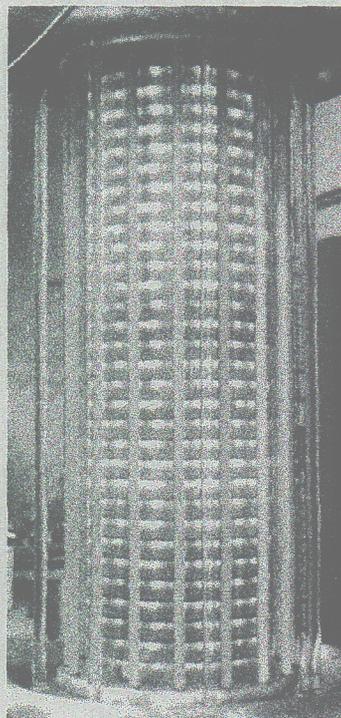


Figure 8. Photograph of 30-stage Ultra-Compact Marx during operation

sufficient to cause the adjacent switches to self-break. Allowing the weakest switch to selfbreak works quite well. Several methods for triggering have been explored. One uses a trigger pin built into the bottom switch. Another employs trigger pulses coupled through the charge lines to the next in-line switch. Figure 9 shows the

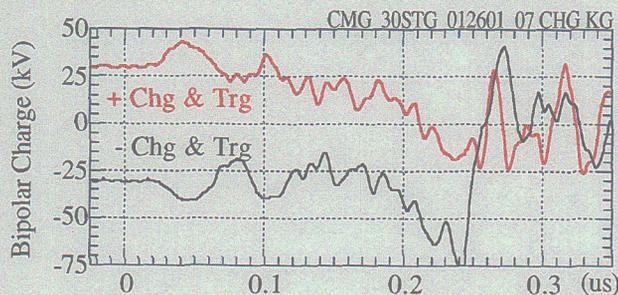


Figure 9. Voltage on charge lines during triggering.

voltage on the charge lines for such a case.

Figure 10 shows a representative output pulse from the prototype 30-stage Marx driving a resistive load. The risetime of the erection process is controlled by the feed-forward coupling capacitors and is comparable to the overall system response. Short circuit testing has also been done to determine system response and compare with circuit modeling. The ultra-compact Marx can be

charged and operated in either polarity, and is capable of withstanding a full voltage reversal.

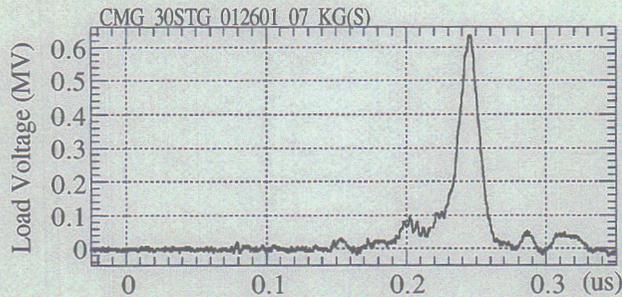


Figure 10. Output voltage into 50 ohm resistive load

Further testing is planned to fully evaluate and characterize the performance of the ultra-compact Marx. Figures 11 and 12 show preliminary information from one

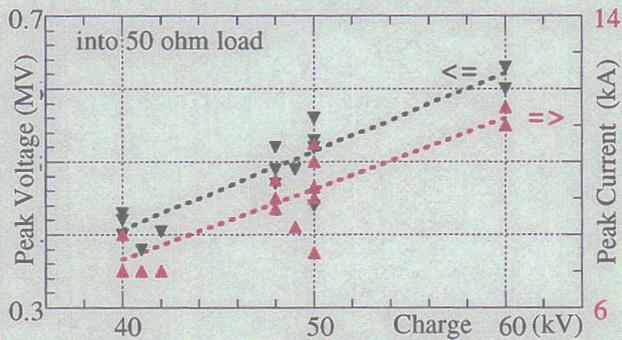


Figure 11. Scaling of peak output levels with charge.

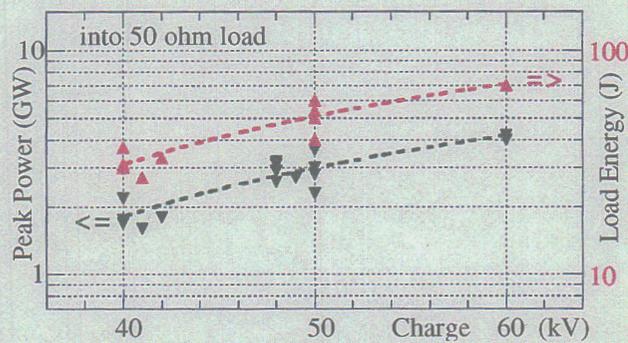


Figure 12. Scaling of output power and energy

series of tests covering the middle portion of the operating range.

IV. SUMMARY

An ultra-compact Marx-type high-voltage generator has been developed and tested. Custom, low-profile components have been devised to achieve performance levels 3 to 5 times higher than normal. An integrated packaging approach has produced an extremely compact assembly and overall high performance.

V. REFERENCES

- [1] D. Goerz and M. Wilson, "Ultra-Compact Marx-Type High-Voltage Generator," U.S. Patent 6,060,791 issued May 9, 2000.
- [2] D. Goerz and M. Wilson, "Toward Higher Performance Ceramic Capacitors," presented at 1998 High Voltage Workshop, Daytona Beach, FL, 1998.
- [3] D. Goerz, M. Wilson, R. Speer, and J. Penland, "Compact Gas Switch Development," LLNL Engineering RD&T Annual Report, UCRL-ID-125475, Feb, 1997.
- [4] D. Goerz and M. Wilson, "A Low-Profile High-Voltage Compact Gas Switch," in Proc. 11th IEEE Pulsed Power Conference, Baltimore, MD, 1997.