Preprint
UCRL-JC-139280

American National Standard ANSI-ANS-8.12-1987: Criticality Control of Plutonium-Uranium Mixtures

M. K. Shaeffer, S. C. Keeton

U.S. Department of Energy
Lawrence Livermore National Laboratory

This article was submitted to
American National Standard 2000 Winter Meeting
Washington, DC
November 12-16, 2000

June 13, 2000

Approved for public release; further dissemination unlimited

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

This report has been reproduced
directly from the best available copy.

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information
P.O. Box 62, Oak Ridge, TN 37831
Prices available from (423) 576-8401
http://apollo.osti.gov/bridge/

Available to the public from the
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Rd.,
Springfield, VA 22161
http://www.ntis.gov/

OR

Lawrence Livermore National Laboratory
Technical Information Department's Digital Library
http://www.llnl.gov/tid/Library.html

AMERICAN NATIONAL STANDARD ANSI/ANS-8.12-1987: CRITICALITY CONTROL OF PLUTONIUM-URANIUM MIXTURES

M. K. Sheaffer (LLNL) and S. C. Keeton (LLNL)

American National Standard ANSI/ANS-8-12-1987 (Ref. 1) was approved for use on September 11, 1987. The history of the development of the standard is discussed in Ref. 2. The first version of this standard, which included subcritical limits only on homogeneous plutonium-uranium fuel mixtures, was approved July 17, 1978. The current version was revised to add limits on heterogeneous systems (Ref. 3). This paper provides additional information on the limits presented in the standard.

As stated in its forward, the standard ". . . provides guidance for the prevention of criticality accidents in the handling, storing, processing, and transporting of plutonium-uranium fuel mixtures outside reactors and is applicable to all operations involving mixtures of plutonium and natural uranium." It constitutes an extension of the American National Standard for Nuclear Criticality Safety in Operations with Fissionable Materials Outside Reactors, ANSI/ANS-8.1-1983 (Ref. 4).

The standard includes subcritical limits[1] for both homogeneous mixtures and heterogeneous lattices of plutonium and uranium. The uranium is assumed to be natural or depeleted. Limits are provided for a variety of mixtures, including aqueous solutions, dry [H/(Pu + U) = 0] mixed oxides at theoretical density, and damp [H/(Pu + U) $\leq$ 0.45] mixed oxides at both theoretical and one-half

[1]The limiting value assigned to a controlled parameter that results in a system known to be subcritical, provided the limiting value of no other controlled parameter of the system is violated. The subcritical limit allows for uncertainties in the calculations used in its derivation, but not for

theoretical density. The limits for homogeneous mixtures shown in Table I cover four different plutonium contents (3, 8, 15, and 30 wt% PuO_2 in PuO_2 + UO_2) and three different isotopic compositions ($^{240}Pu > {}^{241}Pu$; $^{240}Pu \geq 15$ wt% and $^{241}Pu \leq 6$ wt%; $^{240}Pu \geq 25$ wt% and $^{241}Pu \leq 15$ wt%).

Heterogeneous lattice limits for mass, spherical volume, cylinder diameter, and slab thickness are also presented in the standard. Figure 1 shows one such set of limits: the limiting slab thickness curves for heterogeneous systems. Anomalous behavior was noted for the heterogeneous cases with 30 wt% plutonium in PuO_2 + UO_2 with 25 wt% ^{240}Pu and 15 wt% ^{241}Pu. For these cases, the minima calculated for the lattices were greater than the minima for dry theoretical oxide. The lattice minima occurred with very small rod diameters, and it was believed that the resonance absorption treatment employed could not adequately handle the unusual geometry (Ref 5). Thus, the standard does not extrapolate beyond 15 wt% plutonium in the mixed oxide for the isotopic mixture of 25 wt% ^{240}Pu and 15 wt% ^{241}Pu.

The current version of the standard has now been available for 13 years. The last reaffirmation was on February 17, 1993. The standard has been extended until 2001. For the past several years a working group has been examining the subcritical limits using current codes and cross section libraries. A decision to reaffirm this standard is anticipated within the next year. Following this action the working group will assess whether the standard should be revised to include other subcritical limits or isotopic compostions.

---

contingencies, e.g., double batching or failure of analytical techniques to yield accurate values of process variables.

1. "Nuclear Criticality Control and Safety of Plutonium-Uranium Fuel Mixtures Outside Reactors," ANSI/ANS-8.12-1987, American Nuclear Society (1987).

2. R. A. LIBBY, E. D. CLAYTON, "American National Standard ANSI/ANS-8.12-1987 - History and Limits," *Trans. Am. Nuci Soc.*, **62,** 335 (1990).

3. E. D. CLAYTON, H. K. CLARK, G. WALKER, "Basis for Extending Limits in ANSI Standard for Mixed Oxides to Heterogeneous Systems," *Nuc. Tech,* **75,** (November (1986)).

4. "Nuclear Criticality Safety in Operations with Fissionable Materials Outside Reactors," ANSI/ANS-8.1-1998, American Nuclear Society (1998).

5. E. D. CLAYTON "Safety Implications of Anomalous Effects of Neutron Absorbers on Criticality," *Proc. Int Seminar Nuclear Criticality Safety,* Tokyo, Japan, October 19-23, 1987, p.194.

TABLE I

Subcritical Limits for Uniform Aqueous Mixtures of the Oxides of Plutonium and Natural Uranium*

PuO_2 in (PuO_2 + UO_2), wt%	3			8			15			30[a]		
Plutonium Isotopic Composition[b]	I	II	III	I	II	III	I	II	III	I	II	III
Mass of plutonium in oxide mixture, kg	0.73	1.35	2.00	0.61	1.06	1.53	0.54	0.94	1.28	0.50	0.87	1.16
Mass of (PuO_2 + UO_2), kg	27.5	51.3	75.9	8.6	15.1	21.7	4.1	7.1	9.7	1.9	3.3	4.4
Diameter of infinite cylinder (cm)	24.3	30.8	34.8	19.8	24.9	27.5	17.8	22.5	24.8	16.2	21.0	23.4
Thickness of infinite slab (cm)	11.0	14.9	17.4	8.2	11.2	12.9	6.9	9.6	11.0	5.9	8.7	9.9
Volume of oxide mixture (l)	23.5	44.8	63.4	14.0	25.9	34.4	11.0	20.4	26.6'	8.5	16.8	21.6
Concentration of plutonium, g PU/liter	6.8	8.1	9.3	6.9	8.2	9.4	7.0	8.2	9.4	7.0	8.1	9.3.
Concentration of oxides, g(PuO_2 + UO_2)/liter	257[c]	305	351	97.3	116	134	52.9	61.7	71.0	26.5	30.7	35.2
H:Pu atomic ratio	3780	3203	2780	3780	3210	2790	3780	3237	2818	3780	3253	2848
Areal density of plutonium, gPu/cm^2	0.27	0.38	0.47	0.25	0.34	0.42	0.25	0.33	0.41	0.24	.0.32	0.37
Areal density of oxides, g(PuO_2 + UO_2)/ cm^2	10.2	14.4	17.7	3.5	4.8	5.9	1.9	2.5	3.1	0.9	1.2	1.4

* All values are upper limits except atomic ratios which are lower limits.

[a] Dimensional and volume limits do not apply for isotopic composition II and II unless, for II, the concentration of oxides is < 5700 g/l and, for III, < 4500 g/l.

[b] Plutonium isotopic composition: I—$^{240}Pu > ^{241}Pu$, II—$^{240}Pu \geq$ 15 wt% and $^{241}Pu \leq$ 6 wt%, III—$^{240}Pu \geq$ 25 wt% and $^{241}Pu \leq$ 15 wt%.

[c] This concentration is not applicable to oxide mixtures in which the $PuO_2/(PuO_2 + UO_2)$ ratio is < 3 wt% because of the increased relative importance of ^{235}U in high-bearing materials.

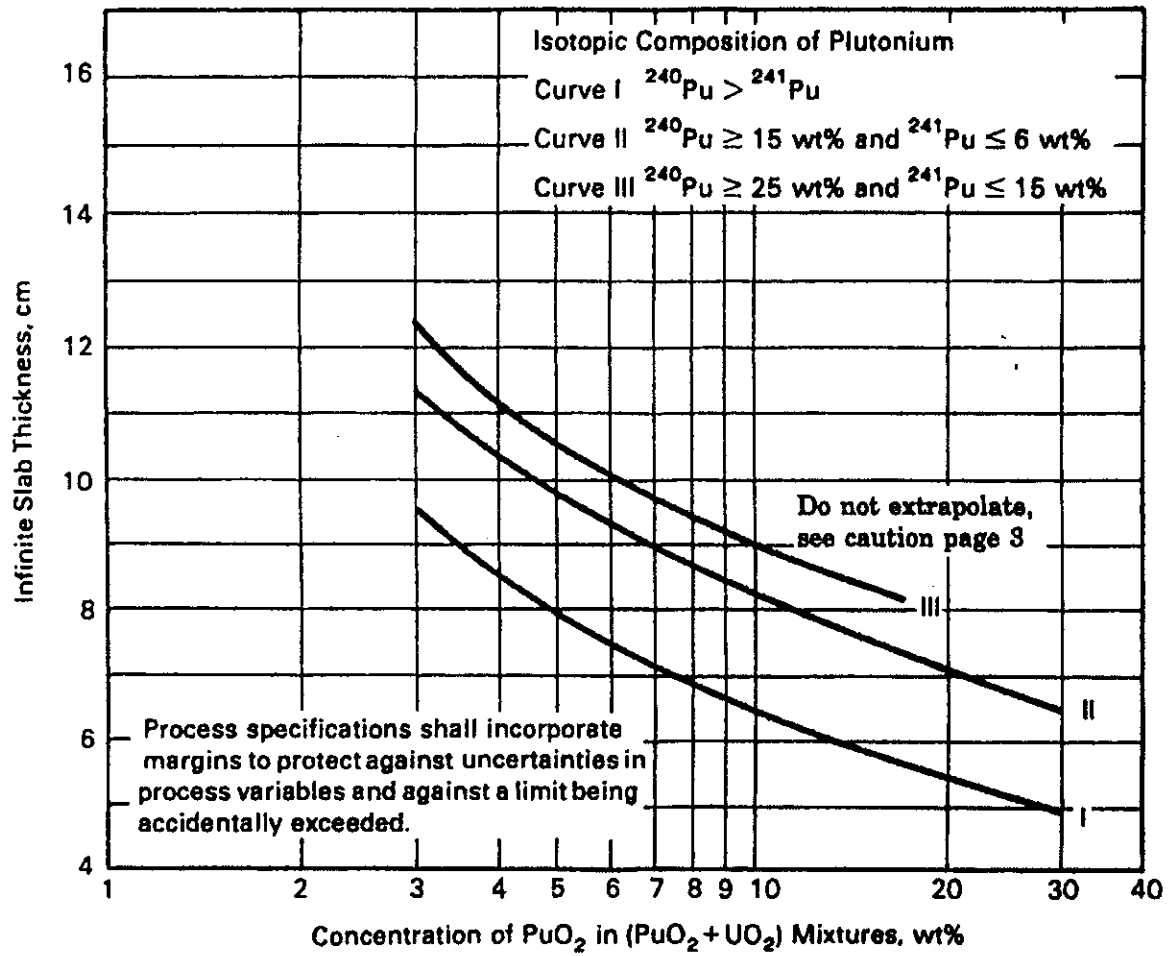

Figure 9. Limiting Thickness of Slabs Containing Heterogeneous Mixtures of the Oxides of Plutonium and Natural Uranium in Water as a Function of the Plutonium Oxide Content.