



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Experimental measurement of Au M-band flux in indirectly-driven double-shell implosions

H. F. Robey, T. S. Perry, H. S. Park, P. Amendt, C. M. Sorce, S. M. Compton, K. M. Campbell, J. P. Knauer

April 11, 2005

Physics of Plasmas

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

Experimental measurement of Au M-band flux in indirectly-driven double-shell implosions

H. F. Robey, T. S. Perry, H.-S. Park, P. Amendt, C. M. Sorce,
S. M. Compton, K. M. Campbell

Lawrence Livermore National Laboratory, Livermore, CA USA 94550

J. P. Knauer

Laboratory for Laser Energetics, Rochester, NY

ABSTRACT

Indirectly-driven double-shell implosions are being investigated as a possible non-cryogenic path to ignition on the National Ignition Facility (NIF). In recent double-shell experiments, the inner shell trajectory was shown to exhibit a strong sensitivity to the temporal history of the M-band (2-5 keV) radiation emitted from the Au hohlraum wall. A large time-dependent discrepancy was observed between measurement and simulation of the x-ray flux in this range. In order to better characterize the radiation environment seen in these implosions, an experimental campaign was conducted on the Omega Laser. A number of diagnostics were used to measure both the temporal and spectral nature of the M-band flux. Results were obtained from an absolutely calibrated 12 channel filtered x-ray diode array (Dante) as well as two streaked crystal spectrometers and an absolutely calibrated time-integrated spectrometer (Henway). X-ray backlighting was also used to directly measure the effect of M-band radiation on the trajectory of the inner shell. The data from all diagnostics are shown to be in excellent agreement and provide a consistent picture of the M-band flux. These results are being used to constrain and improve the simulation of hohlraum-generated M-band radiation that will be necessary for the design of future double-shell implosions employing higher-Z inner shells.

I. INTRODUCTION

Indirectly driven double-shell implosions are being investigated as a possible non-cryogenic path to ignition on the National Ignition Facility¹ (NIF). A NIF-scale double-shell capsule consists of two concentric spherical shells; a high-Z inner shell made of Au/Cu is used to contain the initial high pressure (790 atm) DT gas fill and provide enhanced radiation confinement at ignition time. A Cu-doped Be outer shell acts as the ablator, absorbing hohlraum-generated thermal x-rays and launching a double-shock structure that compresses the inner shell leading to fuel compression and ignition². A low-density ($\sim 10\text{mg/cc}$), nanoporous carbon foam is used to center the inner shell within the outer shell.

These targets provide an approach to ignition that is complementary to the more widely studied cryogenic single-shell designs³⁻⁷. Double-shell target designs present some new and formidable challenges, but also offer several unique advantages. The greatest advantage of this approach lies in the fact that double-shell capsules do not require cryogenic preparation, greatly simplifying the engineering required to field these designs. In addition, these implosions employ a relatively constant temporal profile of the hohlraum-generated x-ray radiation drive. This drive is generated using a laser pulse that delivers most of its energy to the hohlraum early in the pulse and relatively little later in time. Such a pulse shape minimizes plasma-induced backscatter from the ablated Au hohlraum walls, which fills the hohlraum at later time². This is in marked contrast to the Haan pulse⁴ proposed for cryogenic single-shell targets, which delivers the peak laser energy late in the pulse when backscatter can be the most problematical. The high-Z inner shell provides an additional advantage in that it provides strong confinement of radiation in the compressed fuel, thereby minimizing an additional energy loss mechanism from the compressing and igniting fuel.

These advantages come at a cost, however, with a corresponding list of new challenges to be addressed. The fabrication of double-shell targets is considerably more difficult than

their single-shell counterparts, requiring precision micromachining and accurate assembly of the various hemispherical shells. Targets employing lower density materials than those eventually required for ignition on NIF (CH vs. Au-Cu or Be) have recently been fabricated to the required precision⁸ and have successfully been fielded on the Omega laser at the Laboratory for Laser Energetics, University of Rochester⁹. Several additional fabrication challenges remain, however, for the NIF-scale ignition targets.

Another major issue encountered in double-shell research concerns the effect of capsule preheat due to high-energy x rays emitted from the Au hohlraum walls. In particular, the 2-5 keV Au M-band radiation has been identified as a possible explanation for the observed low yield in some previous double-shell implosions¹⁰. These x-rays do not strongly affect the lower-Z outer shell. They are strongly absorbed, however, by the high-Z inner shell and can greatly affect the implosion characteristics. The understanding of high-energy preheat and its temporal history is also of importance for achieving the precision shock timing required in cryogenic single-shell capsule implosions. A recent study by Olsen *et al.*¹¹ demonstrated that it is essential to accurately measure this x-ray source and include it in design simulations.

A clear example of the sensitivity of double-shell performance to M-band preheating was observed in a recent series of implosion experiments on Omega¹². In these experiments, a large time-dependent discrepancy was observed between measurement and simulation of the x-ray flux in the 2-5 keV region. This is shown in Figure 1(a). The measured flux, obtained with an absolutely-calibrated 10-channel filtered x-ray diode array (Dante)¹³, is seen to be reasonably constant in time. In Figure 1(a), the 2-5 keV flux is given as a fraction of the total x-ray flux. The corresponding numerical simulation performed using the radiation-hydrodynamics code, Lasnex¹⁴, by contrast, shows a greatly reduced M-band fraction early in time and a sharp increase in the middle of the pulse. The comparison between measurement and simulation of the full radiation drive history, by

contrast, shows good agreement². The discrepancy between measurement and simulation only appears in the high-energy portion of the spectrum.

This uncertainty in the level of the M-band preheat has a significant consequence for the resulting yield from the implosion. This is shown in Figure 1(b), where the ratio of the experimentally measured yield over the clean, calculated yield (YoC) is shown for a wide range of implosions, both single- and double-shell. The YoC is plotted as a function of the “fall-line” parameter², a measure of the susceptibility of the implosion to the effect of fuel-pusher mix. If one assumes that the Dante measurement of Figure 1(a) is correct, the YoC of the double shells is of order 15-35%, a value very comparable to a wide range of previous single-shell implosions of similar convergence. If, on the other hand, the simulated temporal history of the M-band flux is correct, then the yield ratio is significantly lower, with a YoC of order 8-16%, noticeably below the corresponding value for single-shell implosions. In Figure 1(b), the experimentally measured yield is the same in both cases, but the simulated yield depends strongly on the level of preheat of the inner shell. The higher level of M-band preheat seen in the Dante measurement at early time causes a greater volumetric expansion of the inner shell as compared with the lower simulated preheat. This inner-shell expansion reduces the efficiency of the implosion and the resulting neutron yield.

It is therefore very important to understand this preheat source and ascertain whether it is being measured or predicted correctly. Future double-shell implosion experiments will use inner shells made of materials of higher atomic number, and this issue will become increasingly more important. An accurate prediction of the performance of these double-shell capsules requires an accurate quantification of the level of M-band preheat. This is the goal of the present paper. A new series of experiments are reported employing several additional diagnostics to measure the M-band flux for the laser drive used in double-shell implosions and to confirm its temporal history.

II. EXPERIMENTAL SETUP

In order to better characterize the radiation environment seen in these implosions, a focused experimental campaign was conducted on the Omega Laser. A number of additional diagnostics were used to measure both the temporal and spectral nature of the M-band flux. The absolutely calibrated 10-channel filtered x-ray diode array (Dante) previously used for the measurements shown in Figure 1(a) was augmented with the addition of two channels filtered to improve the spectral resolution of the radiation flux in the 2-5 keV energy range. The previous high-energy channel of Dante (Channel 10) uses a filter comprised of $1.0\ \mu\text{m}$ Fe, $0.65\ \mu\text{m}$ Cr, and $4.5\ \mu\text{m}$ of paralyene (CH at $1.11\ \text{g/cc}$). Its normalized response (including the diode spectral response function) is shown in Figure 2 from 1 - 5 keV. This channel transmits a reasonable fraction of the energy over this entire range with a peak response at 2.9 keV. The transmission of the two new channels added to Dante is shown in Figure 2 as well. Channel 13 uses a $82\ \mu\text{m}$ Saran ($\text{C}_7\text{H}_8\text{NCl}_{13}$) filter, which cuts off at 2.8 keV, and channel 14 uses a $4.5\ \mu\text{m}$ Ag filter with an edge at 3.3 keV.

In addition, the present experiments also employed two time-resolved crystal spectrometers to measure both the temporal history as well as the spectral distribution of the hohlraum radiation flux. Both spectrometers used Rubidium Acid Phthalate (RAP) crystals with a 2d lattice spacing of $26.12\ \text{\AA}$. One of the crystals was flat, giving a nominal spectral range of 2.5-3.5 keV ($3.54\ \text{\AA} < \lambda < 4.96\ \text{\AA}$), and the other was curved to cover the energy range from 1.6-3.6 keV ($3.44\ \text{\AA} < \lambda < 7.75\ \text{\AA}$). Both were coupled to x-ray streak cameras using gold photocathodes, and the data was recorded onto film.

Since the radiation flux in the M-band originates principally from the locations where the laser beams hit the hohlraum wall¹⁰, it is important to compare the views seen by the various diagnostics. The geometry of the experiment and the diagnostic views is shown in Figure 3. Figure 3(a) gives a CAD illustration of the overall target and beam geometry. The hohlraum was $2500\ \mu\text{m}$ in length and $1600\ \mu\text{m}$ in diameter. The x-ray drive was

provided by 20 beams entering each of the two laser entrance holes (LEH). The color of the beams corresponds to their angle with respect to the hohlraum axis. In each LEH, there are 5 beams at 21.4° (red), 5 beams at 42.0° (green), and 10 beams at 58.8° (blue). The beams are pointed and focused to achieve maximal symmetry of the x-ray drive as seen by the capsule¹². On a small number of shots, a thin ($5\ \mu\text{m}$) Sc backlighter foil was mounted on the hohlraum wall and illuminated by an additional six Omega beams, delayed in time, to radiograph the trajectory of the inner shell. On these backlit shots, $50\ \mu\text{m}$ thick Ta shields were mounted on each end of the hohlraum. These shields, with an outer diameter of 7.5 mm and an inner diameter of 1.4 mm, were used to block the direct view of the 4.3 keV Sc backlighter x-rays from any of the principal diagnostics while allowing a clear view of the hohlraum LEH.

Figure 3(b) shows the view of one LEH as seen by Dante. The initial laser spot shapes and locations on the inside of the hohlraum are shown. Laser spots from all three cones are seen by Dante. The spectrometers were oriented so that they viewed the hohlraum from the same nominal angle as Dante (37.38° from the hohlraum axis of symmetry). The two spectrometers, each viewing one of the two LEHs, see a very similar beam pattern as shown in Figure 3(c), so their measured responses should be quite comparable to Dante. The data from the spectrometers will also be compared with measurements from an absolutely calibrated, high resolution, time-integrated spectrometer (Henway)¹⁵. This diagnostic views the hohlraum LEH from 63.43° , and therefore will see a somewhat different magnitude of the x-ray flux than the other diagnostics as shown in Figure 3(d). The spectral structure, however, should be comparable.

For most of the shots, the hohlraum was empty. For a small number, however, capsules were mounted in the hohlraums. On some of these shots, single plastic (CH) shells filled with 20 atm of DD and 0.1% Ar were used. The x-ray emission from the Ar in the hot core was imaged through a $400\ \mu\text{m}$ diameter diagnostic access hole (seen in Figures 3(b, c)) using a gated x-ray framing camera to determine the implosion timing and symmetry. On

several other shots, a “diagnostic” double shell was used with x-ray backlighting to provide the implosion trajectory (radius vs. time) of the inner shell. On these capsules, an oversized outer shell of polystyrene (CH) was used to filter out most of the thermal x-rays, allowing primarily the higher energy M-band x rays to drive the implosion of a CH-coated glass inner shell. The glass strongly absorbs the higher energy x rays, allowing for a direct measure of the effect of M-band radiation at the center of the hohlraum.

III. EXPERIMENTAL RESULTS

Figure 4 shows an example of the data from the one of the two spectrometers. We will focus in this paper on the data from the spectrometer (SSC-A) with the curved RAP crystal, which provided the larger spectral range. In Figure 4, the data has been corrected for the nonlinear response of the film, the transmission response function of all filters (3.5 to 6 mil Be, varying between shots), and the response function of the Au photocathode¹⁶. The spectral energy scale has been calibrated by performing several shots with a Saran filter giving a Cl K-edge cutoff at 2.8 keV. The spectra were also compared with published data¹⁷ on Au M-band spectra to correct for the nonlinearity introduced by the crystal curvature. The temporal response of the streak camera was calibrated using a series of UV fiducial pulses on a separate shot. The absolute calibration of the flux is obtained by scaling to the temporally integrated 2-5 keV Dante channel 10 measurement value. In Figure 4, the abscissa is time in nanoseconds, and the ordinate is spectral energy in keV. The driving laser pulse (nominally 15 kJ in total energy) was 2.3 ns long, with a peak intensity of 10 TW for the first 0.5 ns followed by a monotonically decreasing intensity (see Figure 2 of Ref. 12 for a plot of the laser pulse). This pulse shape is designed to produce a relatively constant thermal x-ray flux in the hohlraum, and as seen in Figure 4, the flux in the 1.6 - 3.6 keV region is relatively constant in time as well.

Figure 5 shows a plot of the temporally integrated spectrometer data over the measured energy range. The absolute magnitude of the spectral intensity (J / keV-sr) for

the spectrometer data was provided by scaling the temporally and spectrally integrated data to the temporally integrated channel 10 measurement of Dante. Several broad dominant peaks are seen in the spectrum at 2.1, 2.5, 2.8, and 3.3 keV. These can be compared with the higher resolution measurements from the Henway instrument, an absolutely calibrated, temporally-integrated spectrometer. This diagnostic contains several crystals to cover a wide spectral range. In Figure 5, data is shown from a flat KAP crystal, filtered with 25 μm Be to cover the spectral range from 2.0-3.6 keV. Since the Henway views the LEH from a steeper angle than either Dante or the streaked spectrometers, a correction needs to be made to account for the geometry. This correction is provided by post-processing the numerically simulated hohlraum flux from Lasnex to obtain the flux seen at 37.38° and 63.43° from the hohlraum axis. This analysis gives a reduction in the magnitude of the x-ray flux by a factor of 1.8 at the Henway location as compared to the Dante or spectrometer locations. The assumption that the radiation goes as the cosine of the viewing angle gives a very similar correction factor of 1.78. This factor has been applied to the Henway data in Figure 5. For the purpose of comparing the two spectra, the Dante-scaled SSC-A data has been multiplied by an additional factor of 1.3 in Figure 5. The agreement between the two spectra is very good, both in the spectral structure as well as the absolute magnitude of the fluxes, which are within 30%. Considerably more detail in the spectral structure is seen in the Henway data due to the higher resolving power ($E / \Delta E \approx 4000$) compared to the lower resolution of the SSC-A ($E / \Delta E \approx 700$). The streaked spectrometer data thus provides a nice cross-calibration between two absolutely calibrated instruments. When all filter transmission functions and geometric correction factors are applied, the absolute fluxes seen by Dante and Henway are in very reasonable agreement as Figure 5 demonstrates.

Turning now to the temporal response, Figure 6 shows a comparison of the spectrally integrated streak camera data with the corresponding Dante measurements for five successive Omega shots. The data from several shots is shown to assess the repeatability of the measurements. Different filter thicknesses were used in the spectrometer on each shot

to enhance the photon statistics in various portions of the spectrum. In this Figure, the spectrometer data has been spectrally filtered with the Dante channel 10 spectral response function shown in Figure 2, convolved with the Dante temporal response function, and scaled in absolute value to match the temporally-integrated flux seen by Dante. Taking into account the unusually large shot-to-shot variability in the pulse shapes and laser energy (10%), the overall repeatability of the temporal history of the M-band flux is very good. There is considerable variation in the peak flux, but in all cases the flux history for both Dante and SSC-A are relatively flat and exceed the simulated flux (dotted line) by a factor of two for the first half of the pulse. The agreement between these two diagnostics confirms that the experimental measurement of the M-band flux shown in Figure 1(a) is indeed correct and that the simulated time history is in error. This also confirms that the YoC of these double-shell implosions is consistent with that observed for a wide range of single-shell implosions as seen in Figure 1(b).

The one consistent difference between the two diagnostics as seen in Figure 6 is the appearance of two distinct peaks in the spectrometer data, one at $t \approx 1$ and one at $t \approx 2$ ns, whereas the Dante response shows a relatively flat response early in the pulse (still well above the simulation) with a single peak at approximately 2 ns. The effect of this small discrepancy on the capsule performance, as determined by numerical simulations using either the Dante or the SSC-A M-band measurements, however, is very small.

This slight difference in response between Dante and the SSC can be better understood by further examination of the spectral response of the spectrometer. In Figure 7, the temporal history of the flux is plotted for four broad sub-regions of the spectrometer data. The four spectral bins (1.9-2.3, 2.3-2.7, 2.7-3.1, and 3.1-3.5 keV, each 400 eV wide) are chosen to contain the dominant M-band spectral peaks seen in Figure 5 at 2.1, 2.5, 2.8, and 3.3 keV. Each curve in Figure 7 is normalized to a peak of unity to account for the differing energy in each of these spectral bins. Shown for comparison is the similarly normalized Dante channel 10 history. The spectrometer data from 2.3-2.7 keV exhibits a

very distinct early-time peak. The other three bins, by contrast, show an early-time response that is equal to or less than that of Dante channel 10. The dominant contribution to the early time peak seen in the spectrometer data of Figure 6 is therefore seen to originate from the M-band emission around 2.5 keV. This helps to explain why channel 10 does not resolve this early peak, as it averages over all of these spectral bins as well as including even higher energy contributions.

An improved comparison between the two diagnostics can be obtained by looking at the two additional Dante M-band channels (13 and 14), which provide a more narrow spectral resolution than channel 10, as was shown in Figure 2. Figure 8 shows a comparison of the normalized signal levels from each of these channels. A slight peak at $t \approx 1$ ns is now clearly evident in both Dante channels 13 and 14, whereas the channel 10 signal is relatively flat at this time. This improved Dante measurement of the M-band emission in the 2.5 keV region is in much better agreement with the spectrometer data, and indicates an early time emission in the hohlraum that is even further from that predicted by Lasnex.

The measurements discussed thus far have all been obtained externally from radiation emitted from the hohlraum LEH. On one shot (#35464), an additional diagnostic was employed to measure the effect of the M-band radiation directly on the inner shell of a double-shell capsule. The capsule was a diagnostic double shell with no fuel to provide any neutron yield. The capsule had an over-sized outer shell of CH, whose primary purpose was to filter out the bulk of the thermal x-ray flux allowing the higher energy M-band x-rays to drive the implosion of a CH-tamped glass inner shell. The implosion trajectory of the inner shell was imaged with a Sc backlighter foil, which was mounted on the hohlraum wall and illuminated by an additional 6 beams of Omega using the same pulse shape, but delayed in time relative to the drive by 1.5 ns. The absorption images of the inner shell were analyzed to provide the capsule radius vs. time. This trajectory is plotted in Figure 9 for both shot # 35464 and a previous shot (#31549), which imaged a similar diagnostic double shell capsule at earlier time. In both cases, the radius is defined by azimuthally averaging

radial lineouts of the backlighter transmission through the inner shell and identifying the location of the transmission minimum. Error bars on the radial positions are estimated by taking the radial locations at which the transmission is 5% greater than this minimum value.

Lasnex simulations of the inner shell trajectory are shown for comparison. The individual capsule dimensions and laser drive histories were used for each of the two shots in separate simulations. The dashed curves give the trajectory obtained using the “standard” M-band simulation, which as seen in Figures 1(a) and 6 were low by a factor of 2-3 for the first half of the pulse. The solid lines give the trajectory simulated using an M-band source scaled to match the temporal history of the Dante channel 10 measurement. This curve is in much better agreement with the data. This provides a more direct measurement of the effect of the M-band source on the double-shell implosion trajectory. This measurement, together with the Dante, SSC-A, and Henway data provide a consistent picture of the hohlraum generated M-band x-rays for this pulse shape.

Having now established that the discrepancy between experimental measurement and simulation is indeed repeatable and observable with multiple diagnostics, a few comments regarding the details of the simulations are necessary in order to properly evaluate the comparisons reported in this paper. In all cases, the Lasnex simulations are two-dimensional integrated hohlraum simulations. The nominal non-local thermodynamic equilibrium (NLTE) model with shell-averaged opacities¹⁸ (XSN) is used for all materials including the Au hohlraum wall as well as all materials comprising the double-shell capsule.

Extensive convergence studies were performed both in frequency space (photon group structure) and in physical space. The simulations employed highly resolved photon group structures (50 eV bins between 2 and 5 keV), and the spatial resolution of the mesh was well refined (initial 10 Angstrom radial zoning and 10 μm axial zoning of the Au hohlraum wall). The spatial resolution of the M-band emitting regions in the Au was allowed to evolve in a Lagrangian manner, maintaining $\approx 1 \mu\text{m}$ by 10 μm zonal resolution

for up to several hundred picoseconds into the laser drive history (sufficient time to observe any enhancement in the M-band emission).

A scan of laser intensities on the hohlraum wall (up to 10^{16} W/cm²) was also conducted to account for the effects of three-dimensional laser spot illumination non-uniformity and the likely hot spots (speckle) present in the unsmoothed beams. The nominal peak laser intensity for an individual beam on the hohlraum wall, for comparison, is 1.6×10^{14} W/cm². These calculations included two-electron effects, e.g., dielectronic recombination, resonant capture, and Auger processes. Despite these convergence studies and implementation of two-electron effects, very little (< 10%) enhancement of the M-band fraction was seen in any of the 2D simulations. Work is ongoing to resolve this discrepancy between modeling and the growing body of experimental evidence suggesting significantly elevated Au M-band emission.

IV. DISCUSSION

The data from this series of experiments provide an unambiguous picture of the temporal history of M-band x-rays generated using a reverse-ramp laser pulse shape. The issue now becomes the identification of the source of the error in the simulation of this flux. A practical interim solution has been demonstrated in Figure 9, where time-dependent emissivity multipliers above 2 keV have been applied to the Au hohlraum wall in order to force the simulations to match the M-band flux as measured by Dante or the SSC-A. This results in simulated implosion trajectories that are in agreement with the radiographic data. A more thorough solution, however, will require improvement in the atomic physics in the code. This effort is underway, and the results will be reported in a forthcoming publication.

V. ACKNOWLEDGEMENTS

This work was performed under the auspices of the U.S. Department of Energy by the University of California, Lawrence Livermore National Laboratory under contract No. W-7405-Eng-48.

VI. REFERENCES

- ¹J. A. Paisner, J. D. Boyes, S. A. Kumpan, W. H. Lowdermilk, and M. S. Sorem, *Laser Focus World* 30, 75 (1994).
- ²Peter Amendt, J. D. Colvin, R. E. Tipton *et al.*, *Phys. Plasmas* **9**(5), 2221 (2002).
- ³J.D. Lindl, *Inertial Confinement Fusion (Springer-Verlag, New York, 1998)*.
- ⁴S.W. Haan, S. M. Pollaine, J. D. Lindl *et al.*, *Phys. Plasmas* **2**, 2480 (1995).
- ⁵D. H. Munro, P. M. Celliers, G. W. Collins, D. M. Gold, L.B. DaSilva, S. W. Haan, R. C. Cauble, B. A. Hammel, and W. W. Hsing, *Phys. Plasmas* **8**, 2245 (2001).
- ⁶S. M. Pollaine, D. K. Bradley, O. L. Landen, R. J. Wallace, O. S. Jones, P. A. Amendt, L. J. Suter, and R. E. Turner, *Phys. Plasmas* **8**, 2357 (2001).
- ⁷L. J. Suter, J. Rothenberg, D. Munro, B. Van Wonterghem, and S. W. Haan, *Phys. Plasmas* **7**, 2092 (2000).
- ⁸R.L. Hibbard *et al.*, *Fusion Science Technology*, to appear (2004).
- ⁹T. R. Boehly, D. R. Brown, R. S. Craxton *et al.*, *Opt. Commun.* **133**, 495 (1997).
- ¹⁰W. S. Varnum, N. D. Delameter, S. C. Evans *et al.*, *Phys. Rev. Lett.* **81**, 5153 (2000).
- ¹¹R. E. Olsen, R. J. Leeper, A. Nobile, and J. A. Oertel, *Phys. Rev. Lett.* **91**, 235002 (2003).
- ¹²Peter A. Amendt, Harry F. Robey, H.-S. Park *et al.*, *Phys. Rev. Lett.* **94**, 065004 (2005).

- ¹³H.N. Kornblum, R.L. Kauffman, and J.A. Smith, *Rev. Sci. Instrum.* **57**, 2179 (1986).
- ¹⁴G. B. Zimmerman and W. L. Kruer, *Comments Plasma Phys. Controlled Fusion* **2**, 51 (1975).
- ¹⁵L. N. Koppel and J. D. Eckels, *LLNL document UCRL-79781* (1977).
- ¹⁶B. L. Henke, J. P. Knauer, and K. Premaratne, *J. Appl. Phys.* **52**(3), 1509 (1981).
- ¹⁷Robert Kauffman, in *Handbook of Plasma Physics, Vol. 3: Physics of Laser Plasma*, Eds. A. M. Rubenchik and S. Witkowski (*North-Holland, Amsterdam*, 1991).
- ¹⁸W.A. Lokke and W.H. Grasberger, "XSNQ-U, a non-LTE emission and absorption coefficient subroutine," UCRL-52276, 1977; copies may be obtained from the National Technical Information Service, Springfield, VA 22161.

VII. FIGURE CAPTIONS

Figure 1. (a) Comparison of the measured M-band fraction with the nominal Lasnex simulation for Omega shot #31551. (b) Difference in the measured-to-predicted neutron yield ratio of a double-shell implosion resulting from the simulated vs. the measured M-band x-ray flux.

Figure 2. Normalized x-ray response function of the three high-energy channels (10, 13, 14) of Dante.

Figure 3. (a) CAD illustration of the target and beam geometry with 40 beams for indirect drive and 6 time-delayed backlighter beams for radiography. View of the laser entrance hole (LEH) and initial beam spots on the inside hohlraum wall as seen by the three principal diagnostics, (b) Dante, (c) temporally-resolved crystal spectrometer (SSC-A), and (d) Henway.

Figure 4. Temporally resolved x-ray spectrum from Omega shot #35457.


Figure 5. Comparison of the spectrometer data with an absolutely-calibrated, temporally-integrated spectrometer (Henway). The Dante-scaled SSC data is multiplied by a factor of 1.3 for comparison.

Figure 6. Comparison of the flux histories of Dante and SSC-A for five successive shots using different filtering on the spectrometer data. The corresponding Lasnex simulation for shot 35457 is shown for comparison.


Figure 7. Comparison of the temporal history of the M-band flux from four discrete energy bins ($\Delta E = 400$ eV) taken from the spectrometer data.

Figure 8. Comparison of the normalized temporal responses of Dante M-band channels 10, 13, and 14.

Figure 9. Trajectory of the inner shell of a diagnostic double shell obtained by backlit x-ray radiography. The dashed curves give the trajectory predicted by the nominal Lasnex simulations, and the solid curves give the simulations using an M-band temporal history scaled to match the Dante measurement.

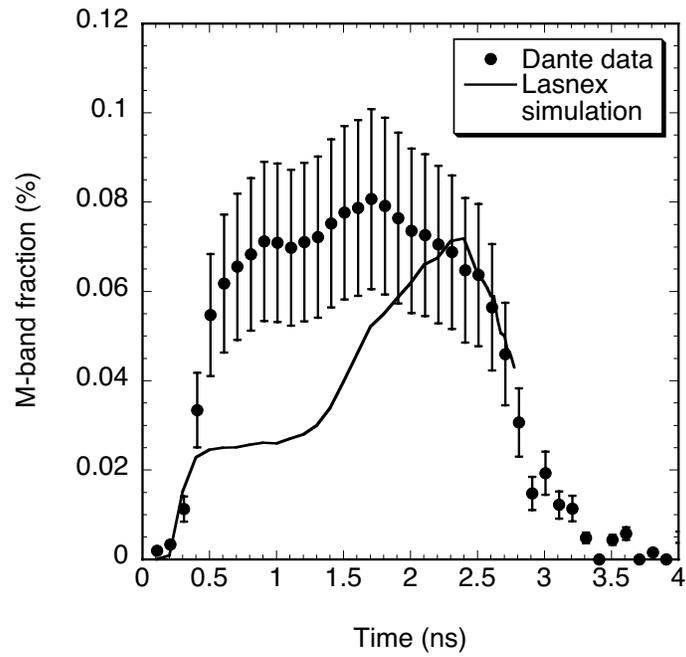

(a)

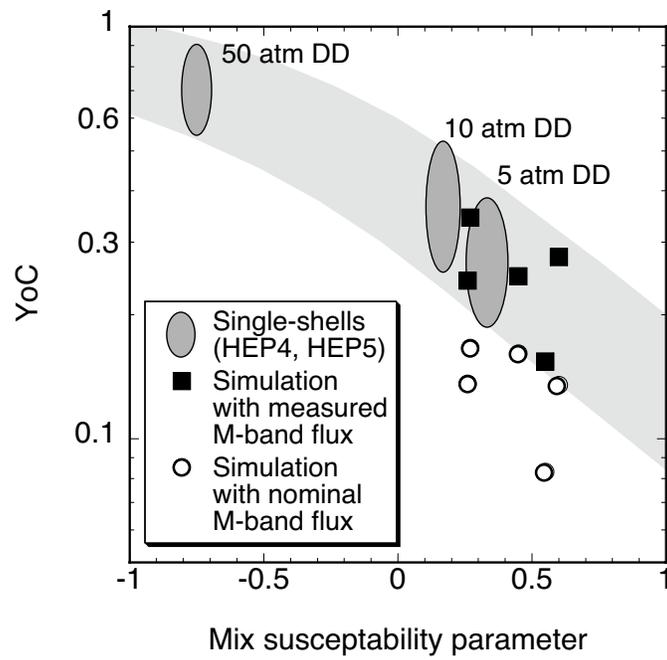

(b)

Figure 1, Robey *et al.*, Phys. Plasmas

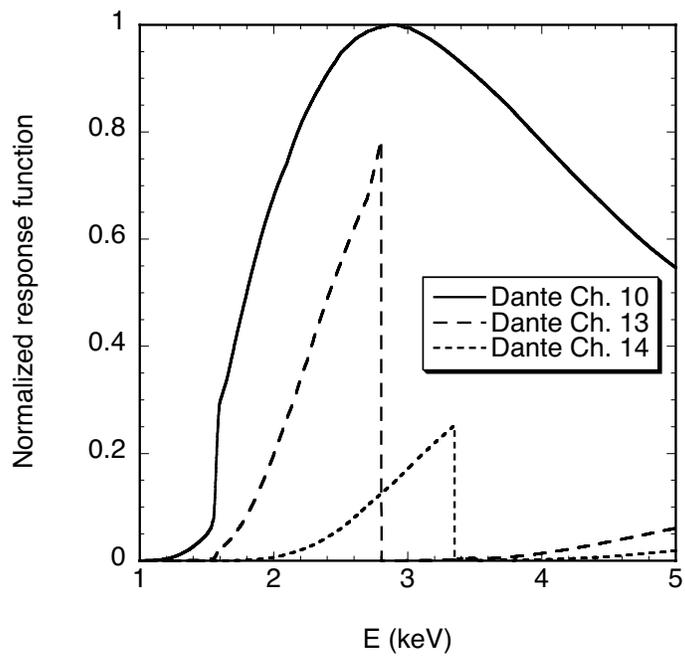


Figure 2, Robey *et al.*, Phys. Plasmas

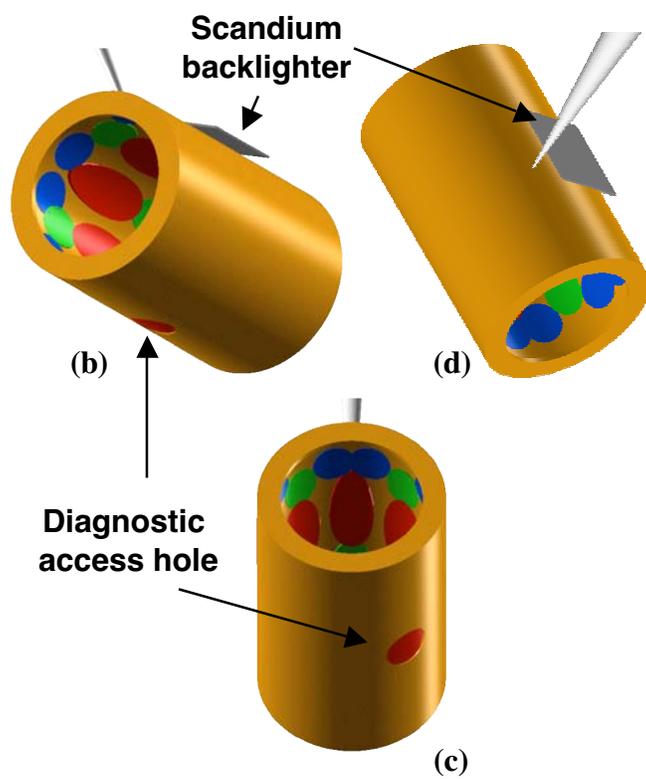
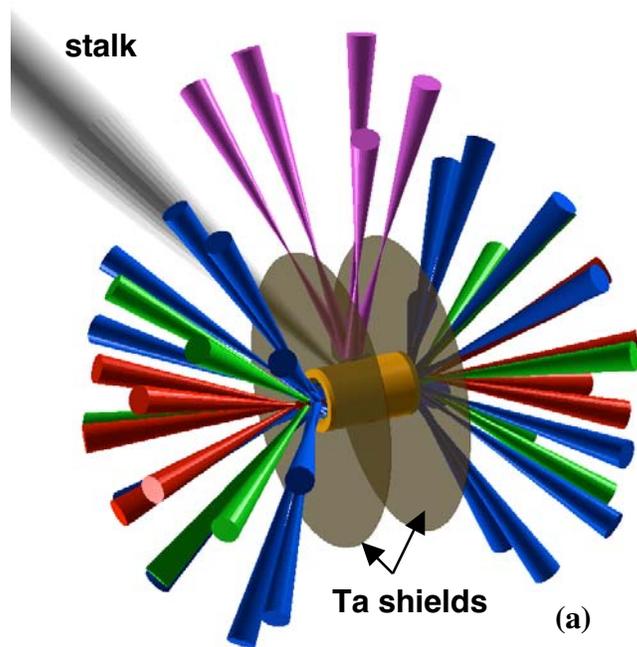


Figure 3, Robey *et al.*, Phys. Plasmas

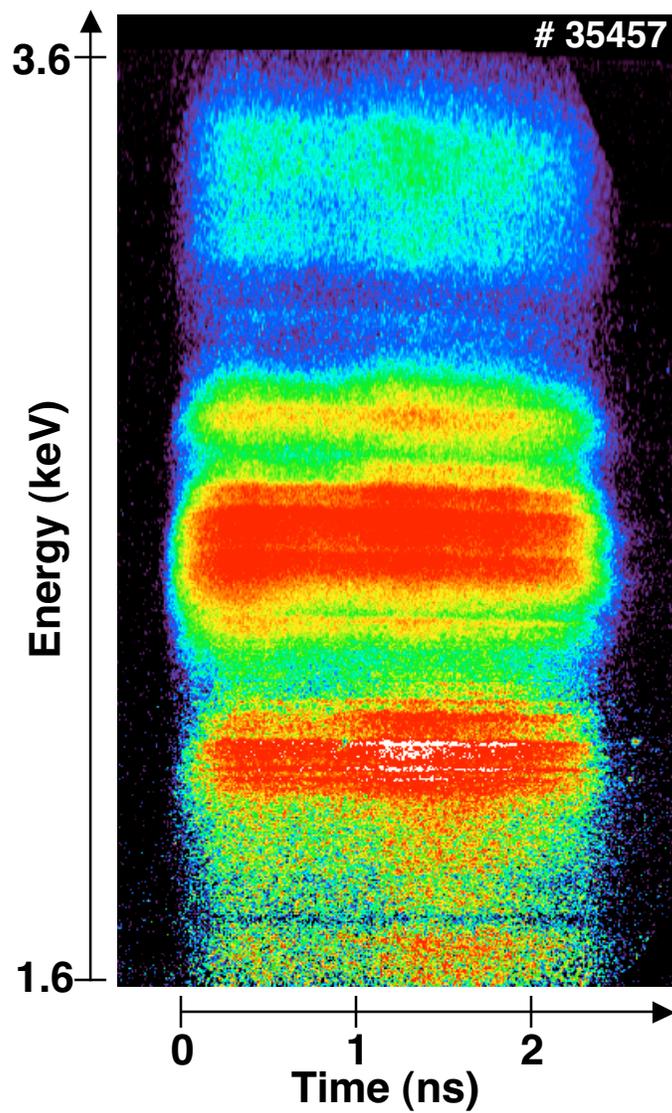


Figure 4, Robey *et al.*, Phys. Plasmas

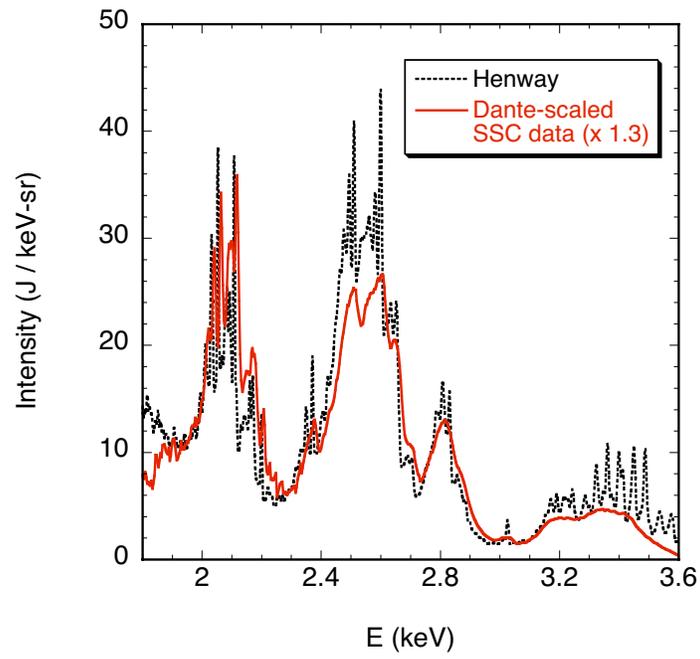


Figure 5, Robey *et al.*, Phys. Plasmas

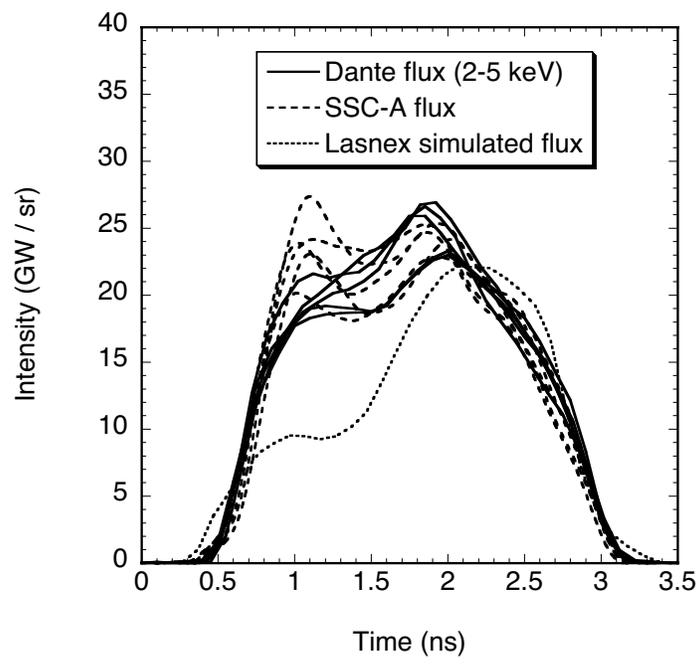


Figure 6, Robey *et al.*, Phys. Plasmas

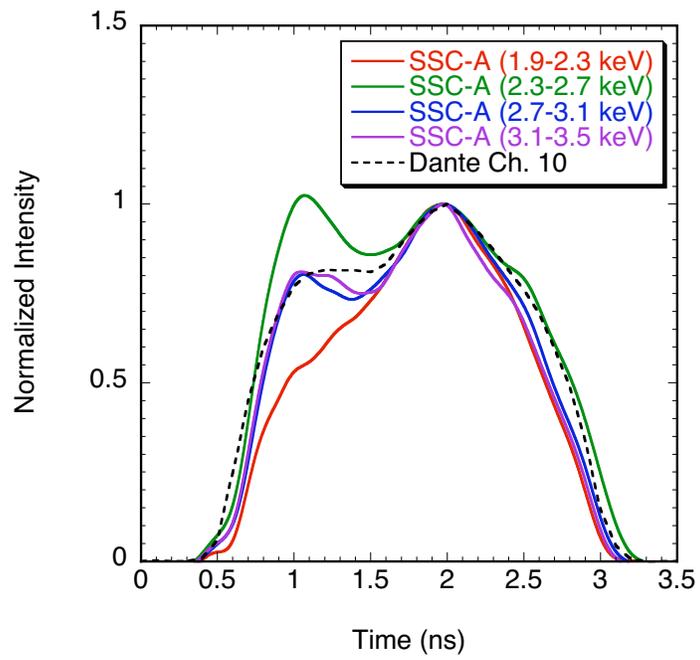


Figure 7, Robey *et al.*, Phys. Plasmas

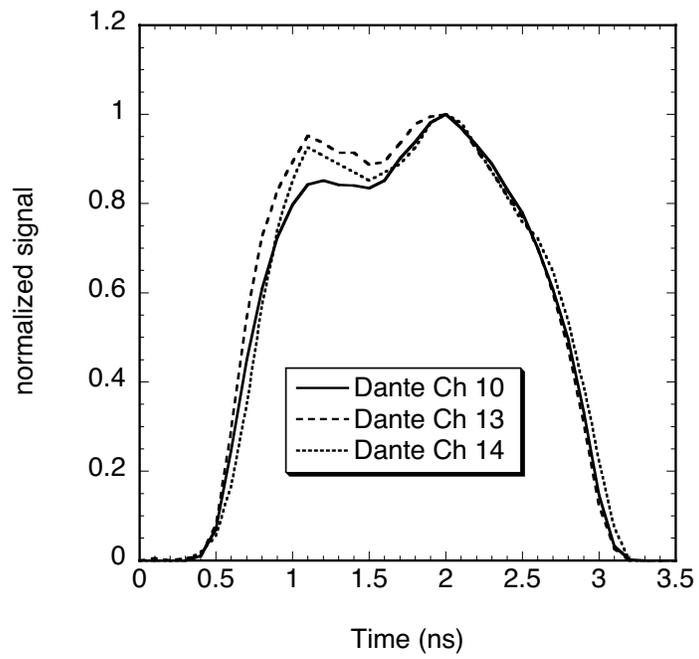


Figure 8, Robey *et al.*, Phys. Plasmas

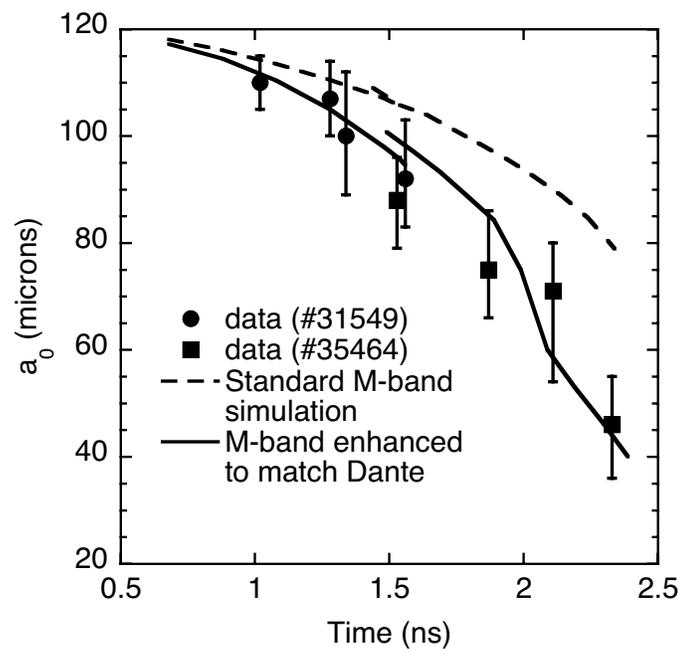


Figure 9, Robey *et al.*, Phys. Plasmas