



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Operational Enhancements in DIII-D Quiescent H-Mode Plasmas

T.A. Casper, K.H. Burrell, E.J. Doyle, P. Gohil, C.J.
Lasnier, A.W. Leonard, T.H. Osborne, P.B. Snyder,
D.M. Thomas, W.P. West

June 28, 2005

32nd EPS Plasma Physics Conference
Tarragona, Spain
June 27, 2005 through July 1, 2005

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This work was performed under the auspices of the U.S. Department of Energy by University of California, Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

Operational Enhancements in DIII-D Quiescent H-Mode Plasmas¹

T.A. Casper¹, K.H. Burrell², E.J. Doyle³, P. Gohil², C.J. Lasnier¹, A.W. Leonard²,
T.H. Osborne², P.B. Snyder², D.M. Thomas², and W.P. West²

1 Lawrence Livermore National Laboratory

2 General Atomics

3 University of California Los Angeles

Abstract

In recent DIII-D experiments, we concentrated on extending the operating range and improving the overall performance of quiescent H-mode (QH) plasmas. The QH-mode offers an attractive, high-performance operating mode for burning plasmas due to the absence of pulsed edge-localized-mode-driven losses to the divertor (ELMs). Using counter neutral-beam injection (NBI), we achieve steady plasma conditions with the presence of an edge harmonic oscillation (EHO) replacing the ELMs and providing control of the edge pedestal density. These conditions have been maintained for greater than 4s (~ 30 energy confinement times, τ_E , and 2 current relaxation times, τ_R [1]), and often limited only by the duration of auxiliary heating. We discuss results of these recent experiments where we use triangularity ramping to increase the density, neutral beam power ramps to increase the stored energy, injection of rf power at the electron cyclotron (EC) frequency to control density profile peaking in the core, and control of startup conditions to completely eliminate the transient ELMing phase.


1.0 Higher Density Regime

To date, we require particle control using divertor cryo-pumping along with neutral-beam injection opposite plasma current (counter-NBI) to achieve QH-mode operation in DIII-D. We are able to achieve QH-mode conditions over a fairly wide range of operating conditions [2] including pedestal stored energy and collisionality consistent with ITER operational needs. We observe this operation to be extremely robust. We maintain QH edge conditions where the pedestal region remains ELM-free with particle exhaust due to

¹ "Work supported by the U.S. Department of Energy by the University of California, Lawrence Livermore National Laboratory under Contracts W-7405-ENG-48, DE-AC03-99ER54463, and DE-FG03-01ER54615."

the presence of an edge harmonic oscillation (EHO). We have found that edge stability is consistent with a model based on peeling-ballooning-mode theory [3]. This theory predicts that the region of stability will expand with stronger shaping. We increase the triangularity within a discharge by pulling the lower x-point down as shown by the EFIT contours in Fig.1. This results in an increase the operating range of both the core and

pedestal densities while maintaining stability to ELMs. In this high-density operation, the coherent EHO transforms to more broadband, turbulent-like fluctuations but the QH characteristics remain. This transition to high-density

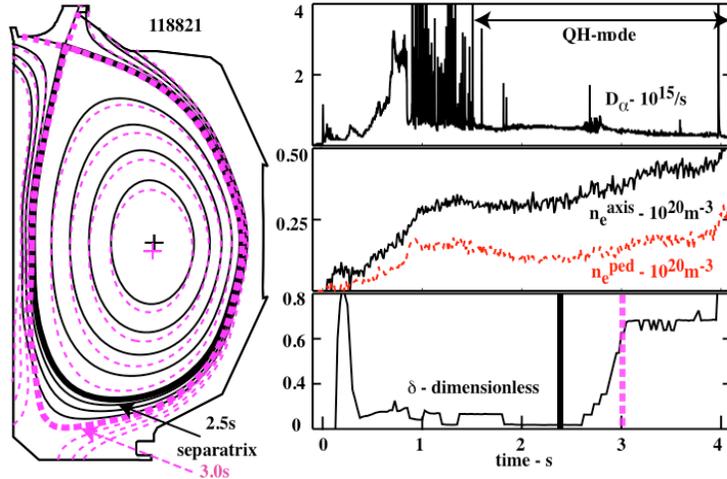

operation is achieved at the expense of core performance in that ion temperature (T_i)

Fig.1 Shape change from 2.5s<t<3s, (EFIT) increases triangularity, δ , to achieve an increase in density. while maintaining the QH-mode

and rotation (Ω_i) decrease in the core (shot 118821 in Fig. 2). This results in a net loss in stored energy and β_N remains relatively constant in time even though the density rises.

2.0 Improved stored energy using control of density profile

We are able to recover this loss in core parameters using a combination of EC power injection and intense NBI along with the triangularity ramping to achieve the higher density operation. Typically, QH-mode discharges exhibit a propensity for forming a core transport barrier in addition to the edge barrier result in quiescent double barrier (QDB) conditions. With the enhanced core confinement due to formation of the transport barrier, additional NBI injection and its fueling in the core can result in pressure profile peaking and β limitations. We have previously observed [4] that EC power injection into the core region provides the ability to control this density profile peaking. Using this combination of EC injection for density profile control and NBI power ramp to increase the stored energy, we achieve $\beta_N \sim 3$ as is shown in Fig 2. This combination of EC and NBI also modifies the core current profile evolution [4]. We achieve long durations, 2s for 118838

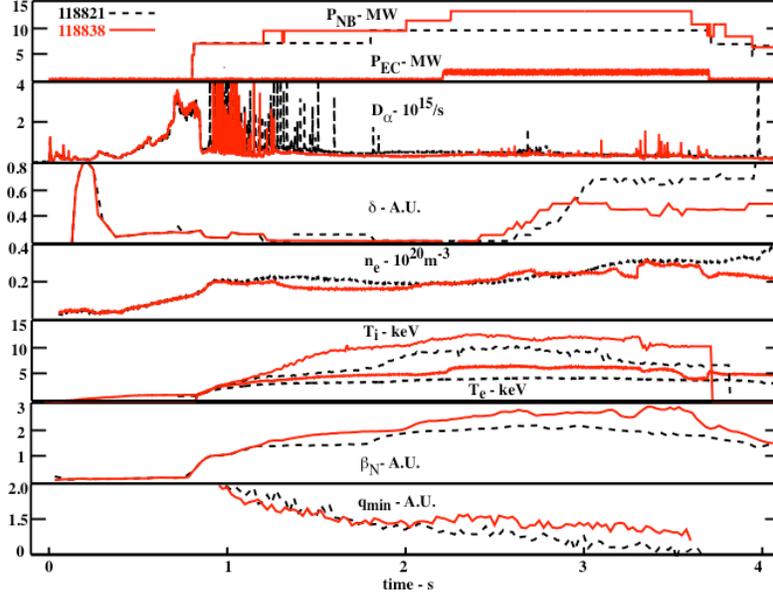


Fig 2. In shot 118838, we ramped the NBI power while using EC power to control the density rise (due to transport barrier with added NBI) to obtain $\beta_N \sim 3$ while maintaining $q_{\min} \sim 1.5$ in QH-mode. Shot 118821 is a constant power high-density QH reference discharge.

and the current profile to alter the value of q_{\min} in these weakly negative shear discharges.

These QH-mode plasmas remain markedly resilient to changes in auxiliary heating power where up to 3MW of EC power plus 15MW of NBI have been injected without loss of the desirable, ELM-free pedestal conditions. We find that, once a threshold in injected power is reached, the edge pedestal conditions remain constant while the core conditions can rise dramatically with the formation of a core transport barrier as indicated by the ion temperature profiles shown in Fig 3. This saturation in edge conditions, while not currently fully understood, results in the resilience of QH discharges to changes in the injected power.

3.0 ELM-free Startup

shown, where the on-axis value of q remains stationary and near 1.5. Establishing this stationary q profile is consistent with a model based on fluctuations and a hyper-resistive current-diffusion [6,7] term in Ohm's law. By controlling the EC and NBI power, we can manipulate both the density profile peaking

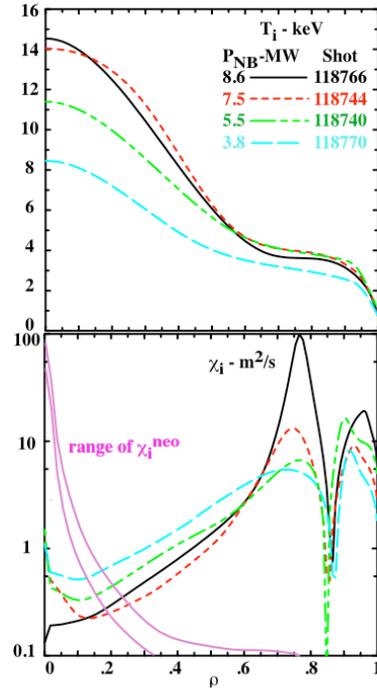


Fig 3. Pedestal T_i remains constant with increased NBI power. Core T_i rises with reduce χ_i as internal barrier (QDB) strengthens.

Utilizing both the advantages of shaping and particle control, we have demonstrated an additional advantage to the QH-mode of operation, plasma startup and totally ELM-free discharge evolution. As we show in Fig. 4, by carefully controlling the startup conditions; plasma shape, fueling and heating, we are now able to access the QH regime directly, without first encountering an extended period of ELMs. This would provide distinct advantages for a QH-mode operating scenario for ITER and fusion reactors.

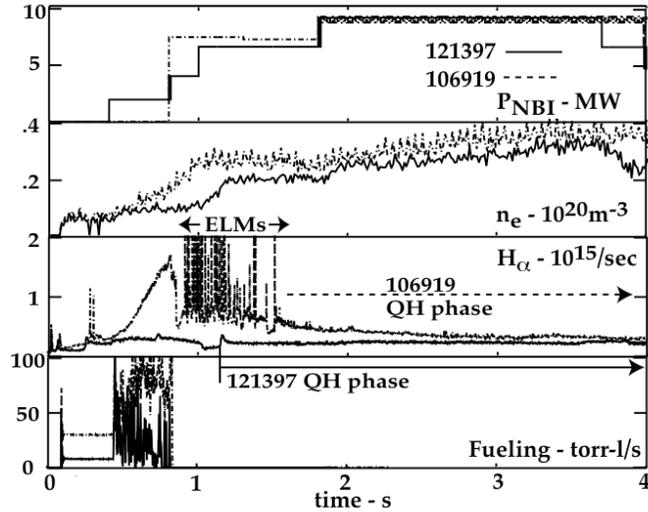


Fig. 4 Using particle and heating control, shot 121397 enters QH phase without ELMing period as compared with an earlier shot 106919

4.0 Summary

In recent DIII-D experiments, we have expanded the regime of QH-mode operation over a fairly broad range of q_{95} , plasma current and toroidal field [2]. As discussed here, using strong shaping we have increased the density range to include operation over $0.1 < n_E^{ped} (10^{20} m^{-3}) < 0.65$. While operation at the higher density resulted in lower core stored energy, using a combination of EC-density control with increased NB power injected, we have more than recovered this loss in stored energy and achieved a peak $\beta_N = 2.85$. In addition, we have improved control of plasma startup and obtained totally ELM-free discharges.

5.0 References

1. D.R. Mikkelsen, Phys. Fluids B **1**,333 (1989),
2. K.H. Burrell, *et al.*, Phys. Of Plasmas **12**, 05121 (2005).
3. P.B. Snyder, *et al.*, 31st EPS Conf. on Plasma Phys., London, 28 June – 2 July 2004 ECA Vol. **28G**, P-2.156
4. T.A. Casper, *et al.*, 30th EPS Conf. on Contr. Fusion and Plasma Phys., St. Petersburg, 7-11 July 2003 ECA Vol. **27A**, P3-207
5. T.A. Casper, *et al.*, Bull. Am.Phys. Soc.**49**,NP1-19, Savannah,GA Nov.15-19, 2004.
6. A.H. Boozer, J. Plasma Phys. **35** (1986) 133.