LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

UCRL-TR-234805

ILC Positron Source Target Update

W. Thomas Piggott, Jeff Gronberg, Lisle Hagler, Anne Sunwoo, Ian Darnell

September 20, 2007

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This work was performed under the auspices of the U.S. Department of Energy by University of California, Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

ILC Positron Source Target Update

Tom Piggott
Jeff Gronberg, Lisle Hagler, Anne Sunwoo, Ian Darnell
Lawrence Livermore National Laboratory
9/17/2007

This work was performed under the auspices of the U.S. Department of Energy by University of California, Lawrence Livermore National Laboratory under Contract W-7405-Eng-48.

Agenda

- Review Action Items from Beijing Meeting
- UK Target Wheel Experiment
  - Rotordynamics
  - Thermal Models
  - Fatigue Modeling
- Material Behavior Issues
  - Fatigue
  - Microstructure
- Thermal Stress Simulations
- COMSOL Liquid Metal Calculations
- Radiation Damage Study with UC-Berkeley

Target Session - Action Items

- Source alternative magnet solutions for first proposed UK target prototype - Ian B to coordinate.
- LLNL to evaluate DL target prototype design for vibrational modes and compatibility with water-cooling design (flow rates, etc) - Tom P to coordinate.
- Rationalise proposed UK prototyping with available funding - Ian B to coordinate.
- Continue evaluation of alternative target materials - Chris D to coordinate.
- Seek further clarification from BINP on their 1ms OMD work - Vinod B to coordinate.
- Adopt common geometry for eddy current simulations (based on UK prototype?) - Jeff G to coordinate.
- Beam window issue remains unresolved? Wei + Alexander to discuss.

Action Items (I)

- Magnet sourced with borrowed magnet from Jim Clarke
- Prototype vibrational modes analyzed (Lisle Hagler), water-cooling not applied to prototype
- Ian and DL/Cockcroft have worked on budget and moved forward
- Alternative Target Materials –funding limited, Ian has preliminary chart

Action Items (II)

- BINP OMD???
- Geometry for eddy current simulations to be the one used for UK magnet experiments
- Beam Windows, upstream is possible, downstream might be but is unclear

Flywheel Critical Speeds
(Stainless Steel Drive Shaft)

Nominal Design Basis Bearing + Mount Stiffnesses

Support Translational Stiffness = 1,000,000 lbf/in Support Rotational Stiffness = 10,000 lbf*in/rad

Campbell Diagram

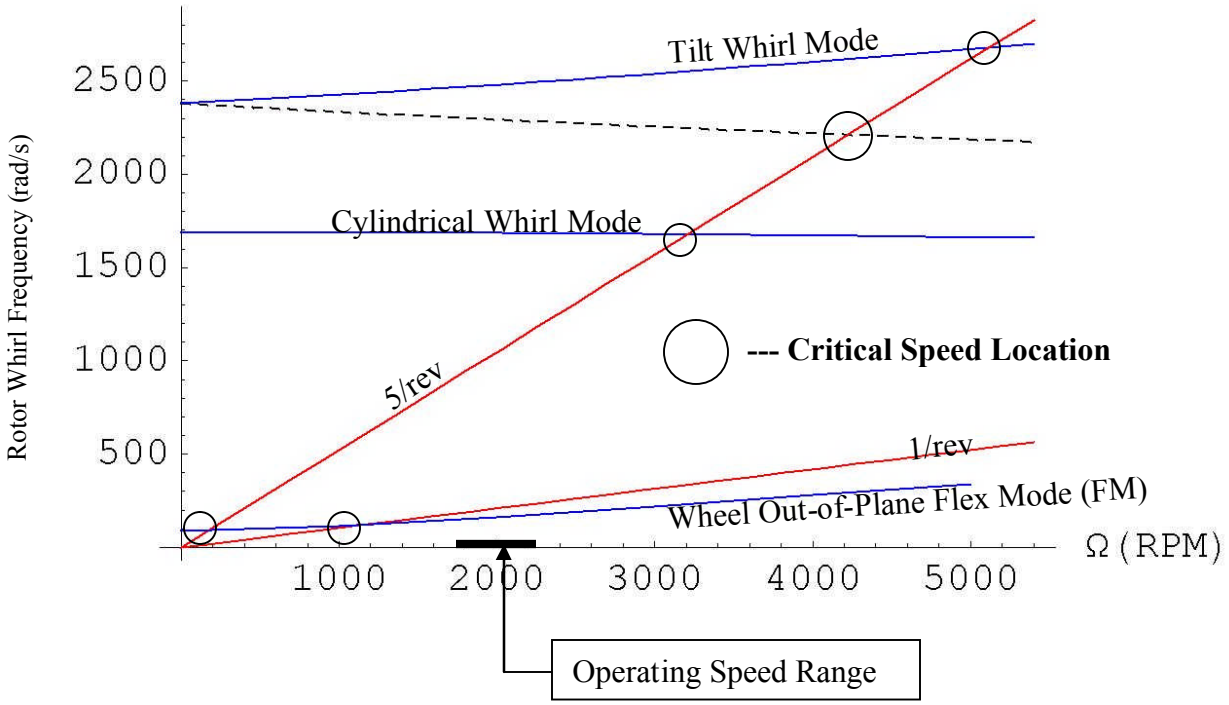

Sources of Rotor Excitation

- Lorentz Force @ 5/rev
- Unbalance @ 1/rev

Major Critical Speeds

- 1st Wheel FM @ ~ 200 RPM
- 2nd Wheel FM @ ~ 1100 RPM
- Cylindrical Whirl @ ~ 3200 RPM
- Forward Tilt Whirl @ ~ 5000 RPM
- Reverse Tilt Whirl @ ~ 4200 RPM

Wheel Out-of-Plane Flex Mode

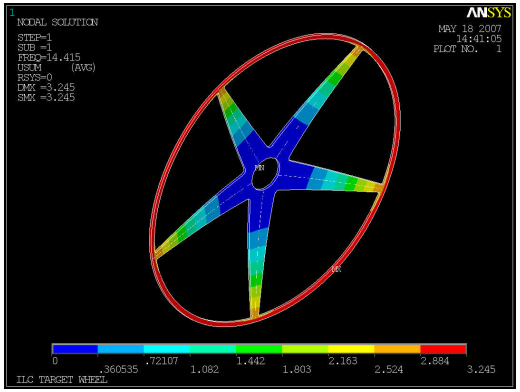

• All critical speeds sufficiently far removed from operating speed range

Wheel Rim Axial Deflection Due to Lorenz Forces + Unbalance

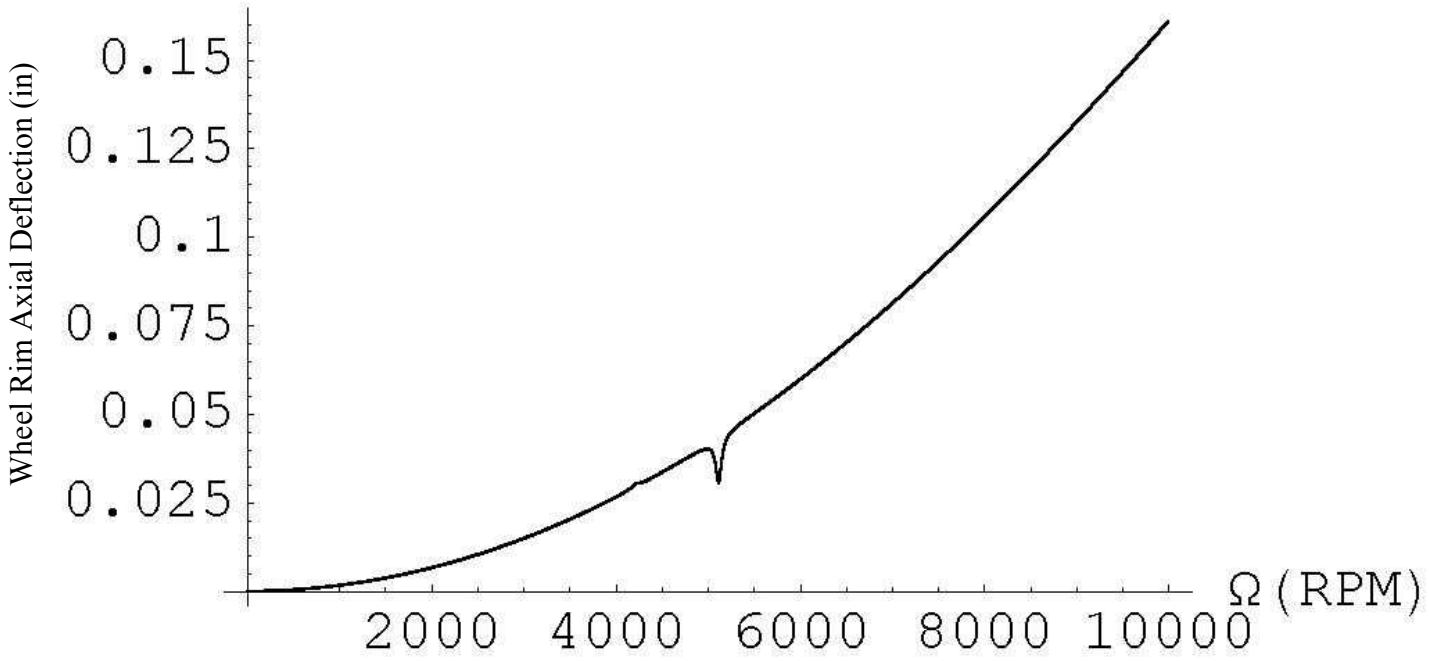

- **Wheel rim deflection less than 10 mils (0.254 mm) at nominal operating speed of 2000 RPM**
- **This result assumes that the wheel can be balanced to within 5 mils and wheel polar axis is within 0.1^{o} of the shaft axis**

Wheel Von Mises Stress At 2000 RPM
Nominal Operating Speed
(Steady-State Inertial and Lorenz Force Loading)

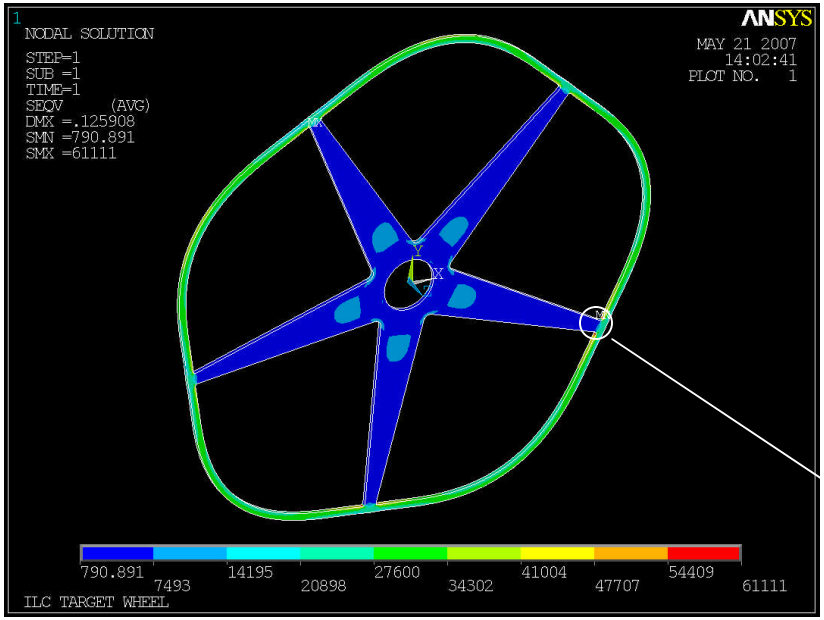

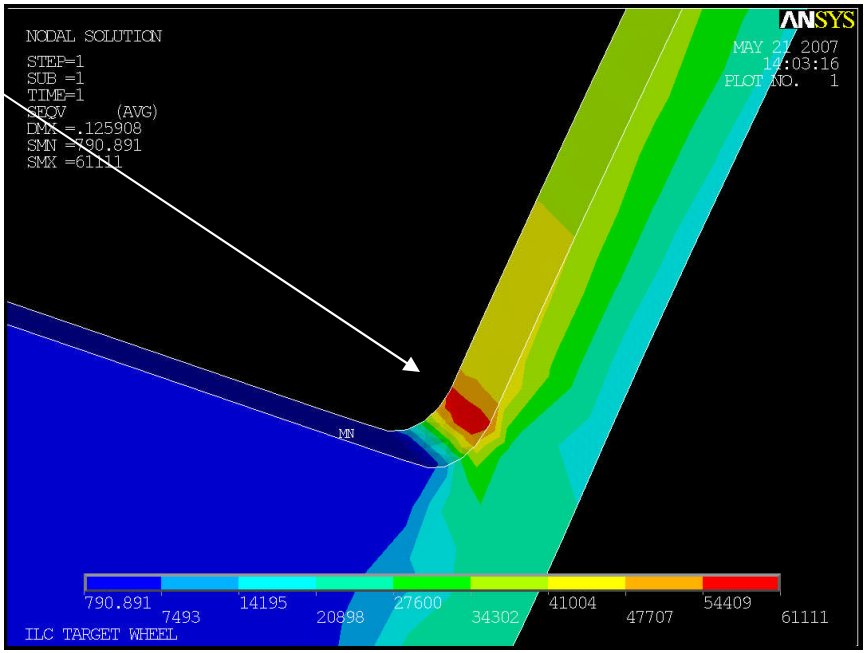

- **Resultant Load on Wheel = Inertial + Lorenz Forces**
- **Maximum Von Mises Stress in Wheel = 61.1 ksi**
- **Titanium Alloy Has A Nominal Yield Strength of 120 ksi**
- **Safety-Factor = ~ 2.0**

Rotordynamic Conclusions

- All the critical speeds are adequately removed from the ILC wheel operating speed range of 1800 RPM to 2200 RPM for the latest ILC system design using the plumber-block roller bearings
- Bearing dynamic loads are well below capacity
- High stiffness of roller bearing necessary to keep major critical speeds away from wheel operating speed range
- Lorenz force and inertial loading will not cause the wheel to rub the magnet in the operating speed range
- There will be no yielding or rupture of the wheel in operating speed range

Fatigue Calculations

- Fatigue failure is failure due to the action of repeated stress loading
- This can occur at load levels below the yield strength of the material
- Failure begins with a small crack at a discontinuity in the material, which then propagates and leads to a sudden fracture
- Failure can occur without warning

Fatigue Strength of Ti6Al4V

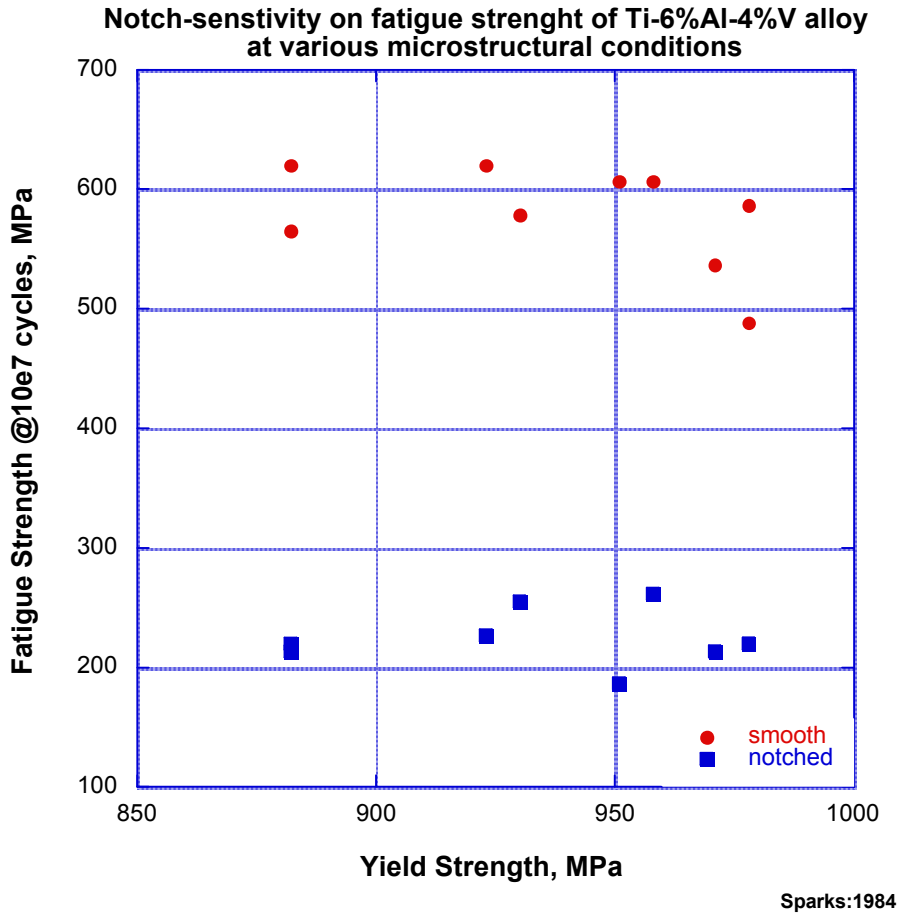

Fatigue Calculations for Prototype Wheel

- High Cycle Fatigue- Loading due to spokes being influenced by magnetic field
- Low Cycle Fatigue- Loading due to spin-up/spin down of target wheel to operating conditions
- High cycle fatigue has a margin of safety of about 2
- Low cycle fatigue has a margin of safety of about 1, with further calculations showing a fatigue life of about $6*10^6$ cycles

Heating Calculation for Prototype Wheel

- Worst case scenario
- Uniform heating in outer rim
- Thermal expansion in shaft appears unlikely
- Temperature in K

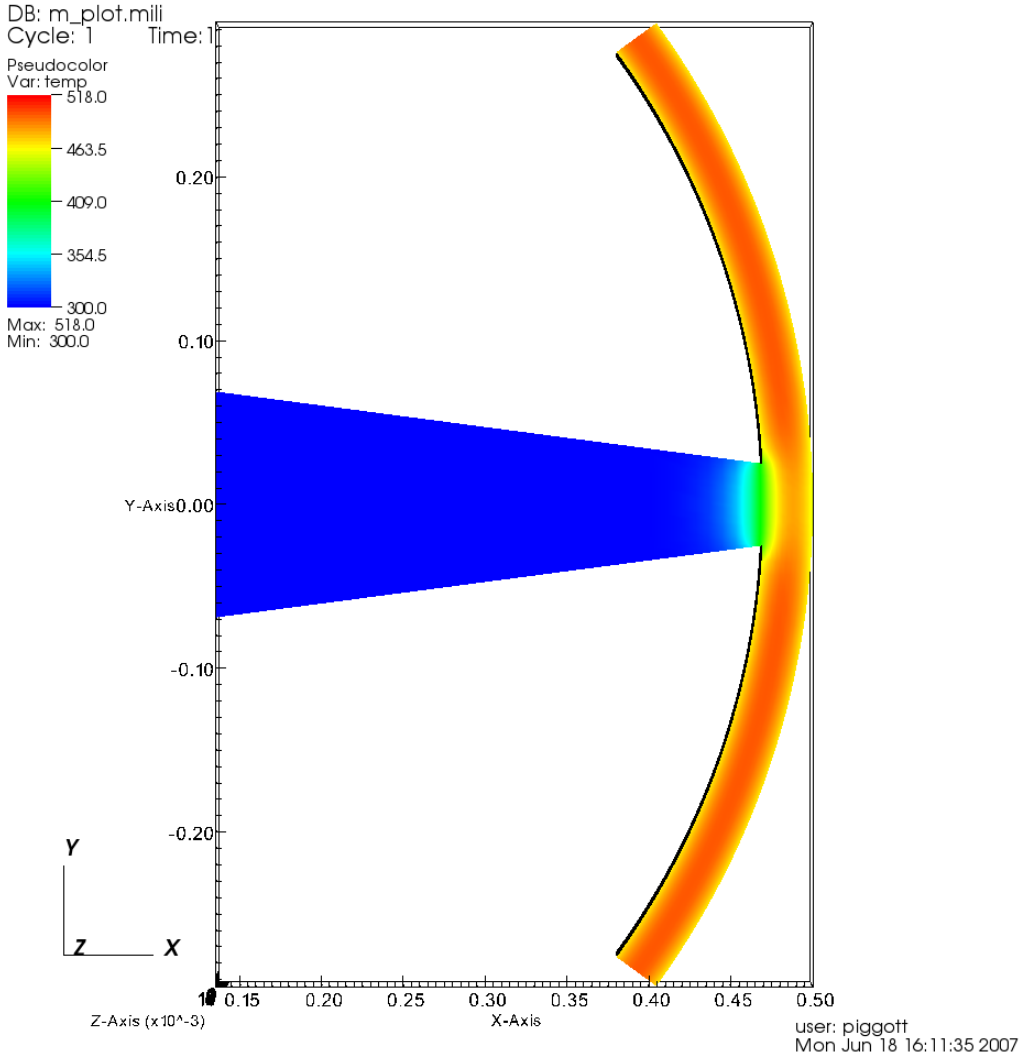

Thermal Stress Simulations

- Series of calculations using a thermal code sequentially coupled with an explicit or implicit structural code
- Working on slice models to work out mesh and other analysis requirements
- Values used to determine loading based on J. Sheppard's quarter-wave transformer specifications
- Improved heat generation model used

$$\dot{q}(x,y,z) = \frac{Q}{2\pi\sigma^2}\exp\left(-\frac{r^2}{2\sigma^2}\right), r^2 = \left(\frac{x-x_o}{x_{fl}}\right)^2 + \left(\frac{y-y_o}{y_{fl}}\right)^2 + \left(\frac{z-z_o}{z_{fl}}\right)^2$$

- Uniform distribution through material assumed- will be refined as work progresses

Temperature Results

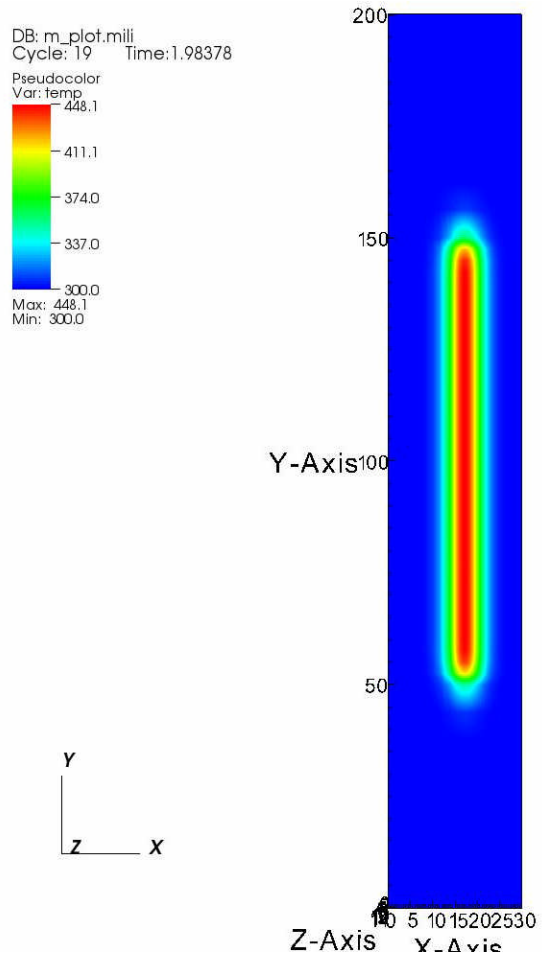

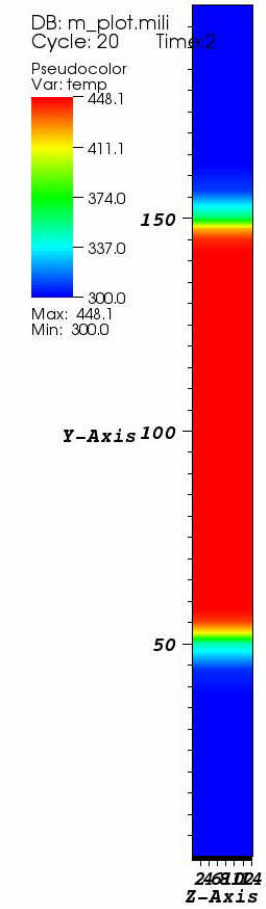

- Coarse Mesh, 22400 Elements, T_{max}=448.1 K
- Fine Mesh, 179200 Elements, Tmax=449.6 K

Thermal Stress Results

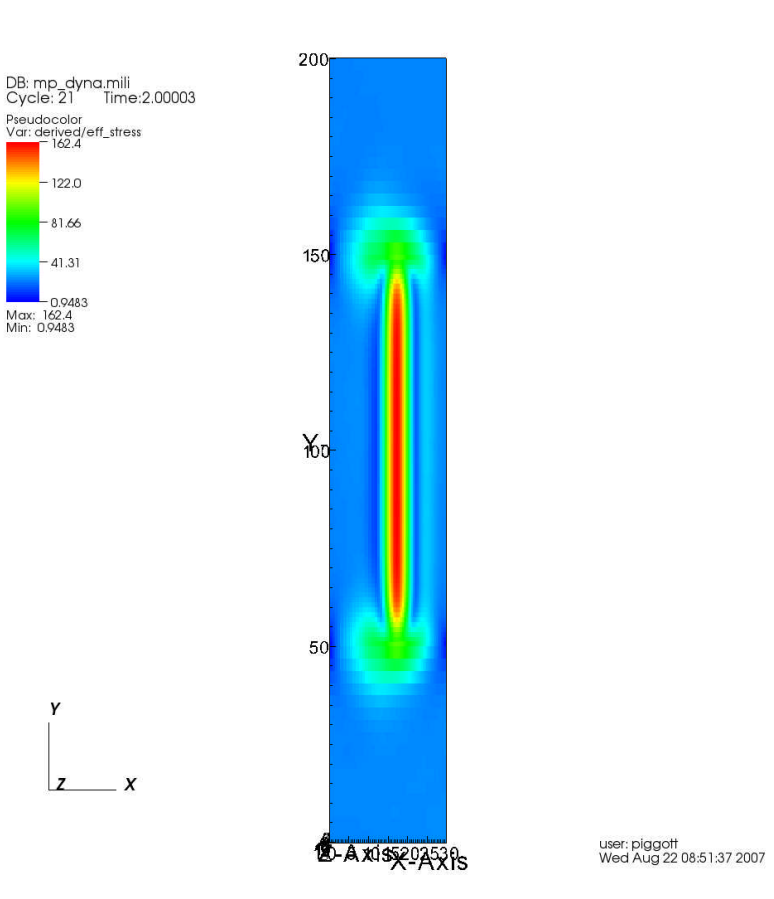

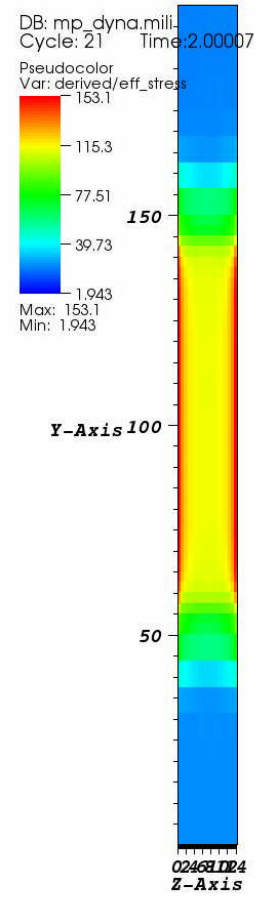

- Coarse Mesh, 153.1 MPa max
- Fine Mesh, 162.4 MPa max

Von Mises Stress (MPa)

WRe Thermal Stress

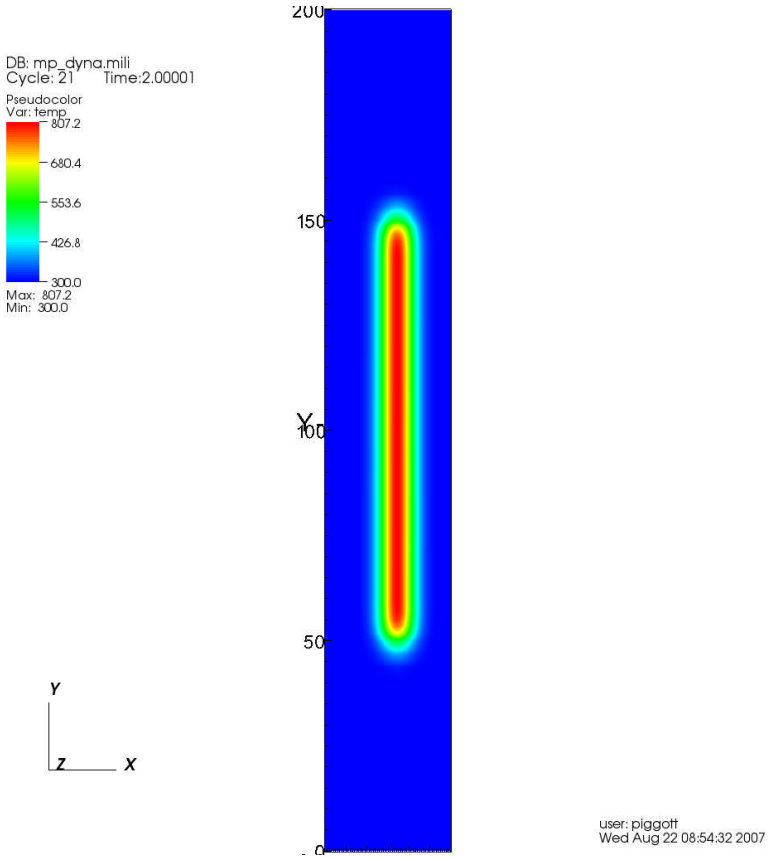

Fine, Max=807.2 K

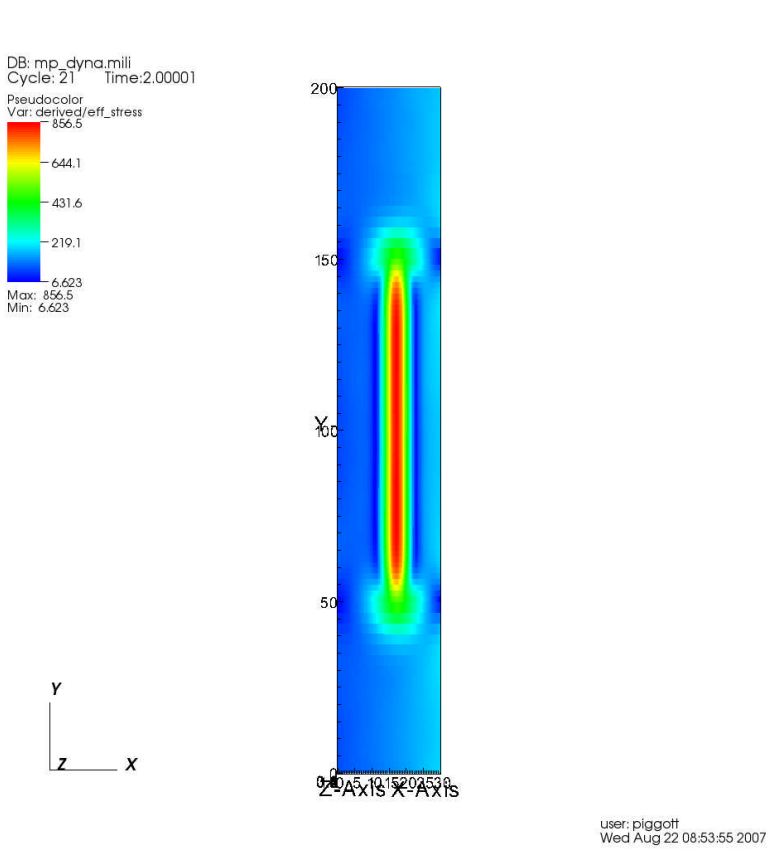

Fine, Max=856.5 MPa

Spot Size Comparisons- Temperature

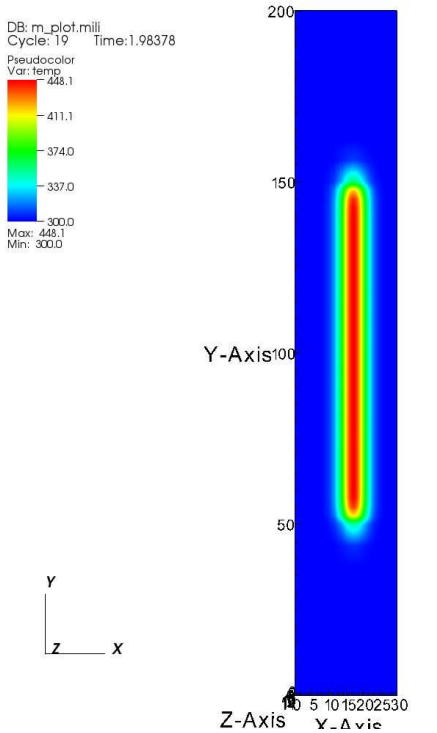

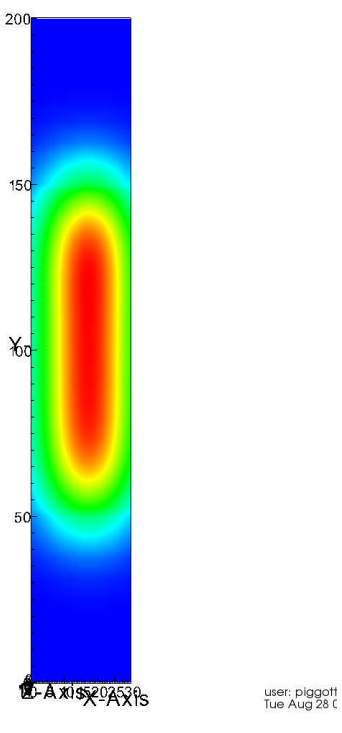

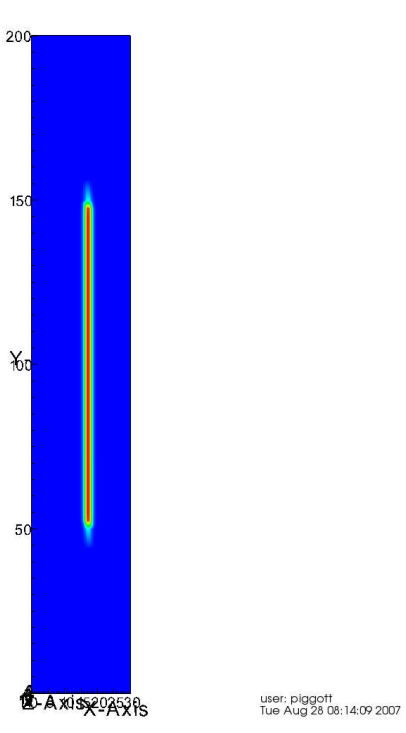

Sigma=1.7 mm
T_{max}=448.1 K

Sigma=3.4 mm
T_{max}=357.5 K

Sigma=0.85 mm
T_{max}=813.4 K

Spot Size Comparisons- von Mises Stress

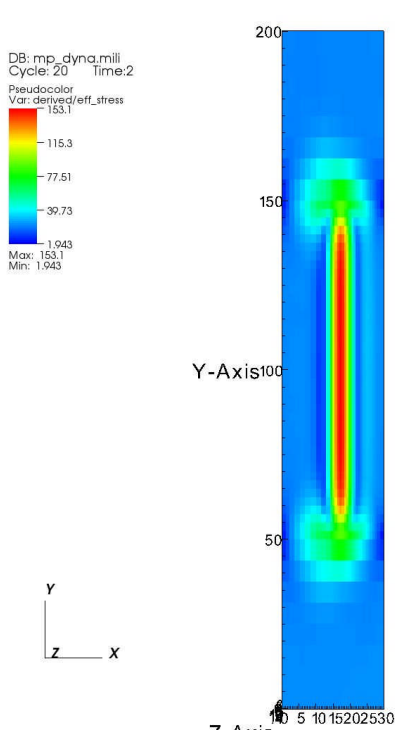

Sigma=1.7 mm
σ_{max}= 153.1 MPa

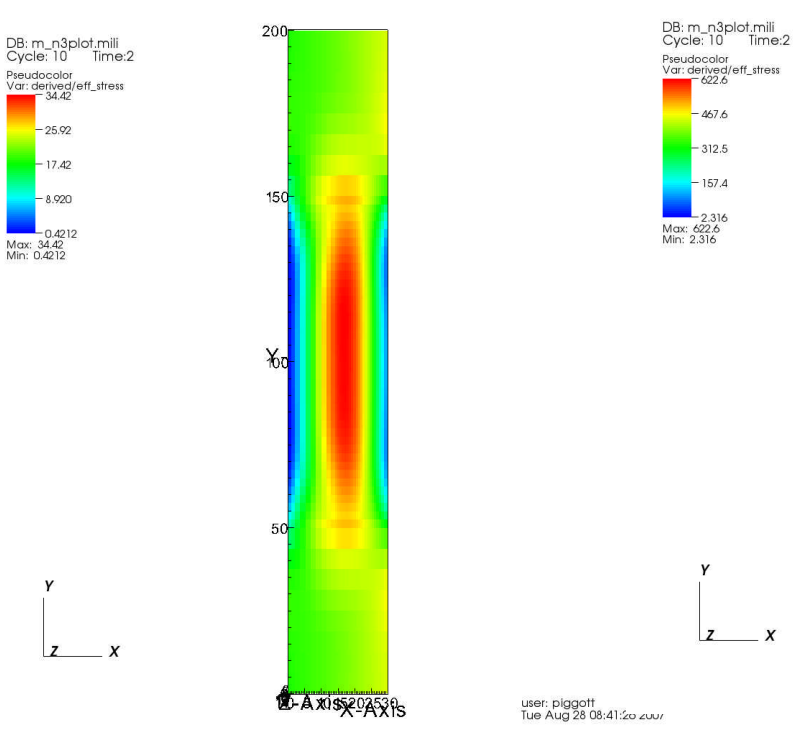

Sigma=3.4 mm
σ_{max}= 34.42 MPa

Sigma=0.85 mm
σ_{max}= 622.6 MPa

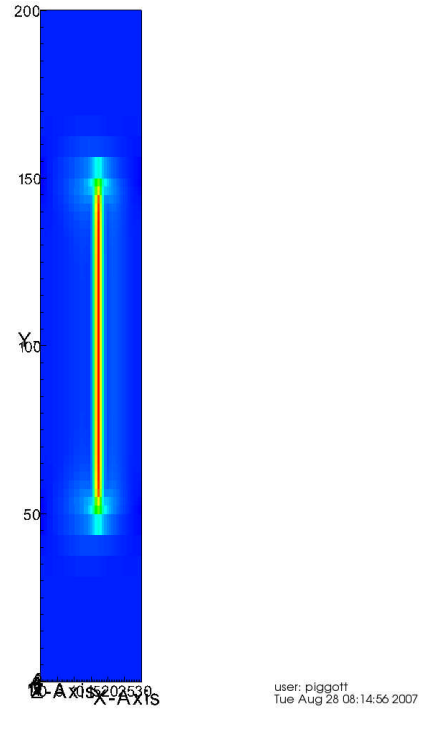

Other Activities

- Model is in development using COMSOL Multiphysics to model stress effects for lithium lens and liquid metal targets
- Contract is underway with Brian Wirth at UC-Berkeley to evaluate radiation damage effects and resolve disagreement from previous studies
  - Delays due to contract transition and logistical delays

Future Work

- Continue thermal stress simulations for different loading (heat input and cooling) cases, mesh densities
- Incorporate desired thermal stress cases into larger model incorporating wheel motion
- Look into material properties, including fatigue strength and radiation damage property degradation
- Continue working with UC-Berkeley on radiation damage with assistance from A. Ushakov
- Continue working with DL on prototype wheel experiment
- Duplicate prototype wheel calculations as well as possible to provide an accuracy check
- Continue development work on liquid metal/lithium lens model