



LAWRENCE  
LIVERMORE  
NATIONAL  
LABORATORY

# Solving Partial Differential Equations on Overlapping Grids

W. D. Henshaw

September 23, 2008

ASTRONUM-2008  
St. John, United States  
June 8, 2008 through June 14, 2008

## **Disclaimer**

---

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

## Solving Partial Differential Equations on Overlapping Grids

William D. Henshaw

*Centre for Applied Scientific Computing, L-550, Lawrence Livermore National Laboratory, Livermore, CA, USA, 94551*

**Abstract.** We discuss the solution of partial differential equations (PDEs) on overlapping grids. This is a powerful technique for efficiently solving problems in complex, possibly moving, geometry. An overlapping grid consists of a set of structured grids that overlap and cover the computational domain. By allowing the grids to overlap, grids for complex geometries can be more easily constructed. The overlapping grid approach can also be used to remove coordinate singularities by, for example, covering a sphere with two or more patches. We describe the application of the overlapping grid approach to a variety of different problems. These include the solution of incompressible fluid flows with moving and deforming geometry, the solution of high-speed compressible reactive flow with rigid bodies using adaptive mesh refinement (AMR), and the solution of the time-domain Maxwell's equations of electromagnetism.

### 1. Introduction

We give an overview of our work on overlapping grids and describe its application to a variety of different problems with the intent of providing those in the astro-physical community, perhaps not overly familiar with the technique, a flavour of the types of problems that it has been applied to. Our approach is based on the use composite overlapping grids to represent the problem domain as a collection of structured curvilinear grids. This method, as discussed in Chesshire and Henshaw (1990), allows complex domains to be represented with smooth grids that can be aligned with the boundaries. The use of smooth grids is particularly important for obtaining accurate approximations to the partial differential equations (PDEs) and boundary conditions. The majority of an overlapping grid often consists of Cartesian grid cells so that the speed and low memory usage inherent with such grids is retained. Overlapping grids, also known as Chimera or overset grids have been used successfully for the numerical solution of a wide variety of problems, see for example, Meakin (1999); Henshaw and Schwendeman (2008), and the references therein.

Solving partial differential equations on overlapping grids with moving geometry and adaptive mesh refinement (AMR) involves considerable programming complexity due to the multiple computational index spaces and curvilinear geometries as well as the component grid generation and overlapping grid interpolation and hole cutting requirements. We have developed a freely available software framework called Overture that provides support for the solution of PDEs on overlapping grids. We have also developed a set of composite grid

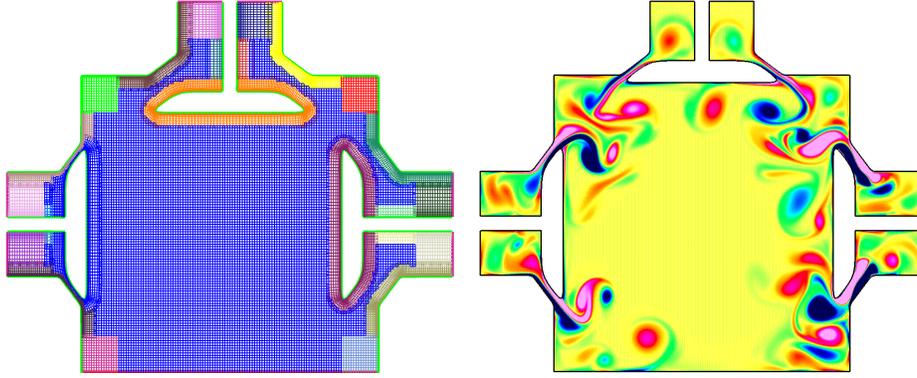


Figure 1. Left: the overlapping grid (coarse version) for three moving valves. Right: contours of the vorticity at some instant in time computed from the solution to the incompressible Navier-Stokes equations. The valves move at each time step according to a specified motion.

solvers that are available with the CG software<sup>1</sup>. These include solvers for incompressible and compressible fluid flow as well as Maxwell's equations, as described further in subsequent sections.

## 2. Incompressible Flows

We solve the incompressible Navier-Stokes (INS) equations with a pressure-velocity formulation and a split-step method (the pressure is solved as a separate step). The equations are given by

$$\begin{aligned} \mathbf{u}_t + (\mathbf{u} \cdot \nabla) \mathbf{u} + \nabla p - \nu \Delta \mathbf{u} - \mathbf{f} &= 0, & t > 0, \quad \mathbf{x} \in \Omega \\ \Delta p - \nabla \mathbf{u} : \nabla \mathbf{u} - \alpha \nabla \cdot \mathbf{u} - \nabla \cdot \mathbf{f} &= 0, & t > 0, \quad \mathbf{x} \in \Omega \end{aligned}$$

with initial conditions and boundary conditions,

$$\begin{aligned} \mathbf{u}(\mathbf{x}, 0) &= \mathbf{u}_I(\mathbf{x}), & t = 0, \quad \mathbf{x} \in \Omega, \\ \mathcal{B}^F(\mathbf{u}, p) &= 0 & t > 0, \quad \mathbf{x} \in \partial\Omega. \end{aligned}$$

Here  $\mathbf{u}$  is the velocity,  $p$  the pressure and  $\nu$  the kinematic viscosity. The term  $\alpha \nabla \cdot \mathbf{u}$  in the pressure equation is important to add in the discrete approximation and acts as a damping term on the divergence of the velocity. A second-order accurate and fourth-order accurate scheme are available, see Henshaw (1994); Henshaw *et al.* (1994); Henshaw and Petersson (2003) for more details. There has been some controversy as to the appropriate boundary conditions for the pressure at a no-slip wall. For a no-slip wall we use the physical boundary conditions (i.e. conditions required by the continuous equations to define a well-posed problem),

$$\mathbf{u} = 0, \quad \nabla \cdot \mathbf{u} = 0, \quad \mathbf{x} \in \partial\Omega,$$

---

<sup>1</sup>Overture and CG are available at [www.llnl.gov/casc/Overture](http://www.llnl.gov/casc/Overture)

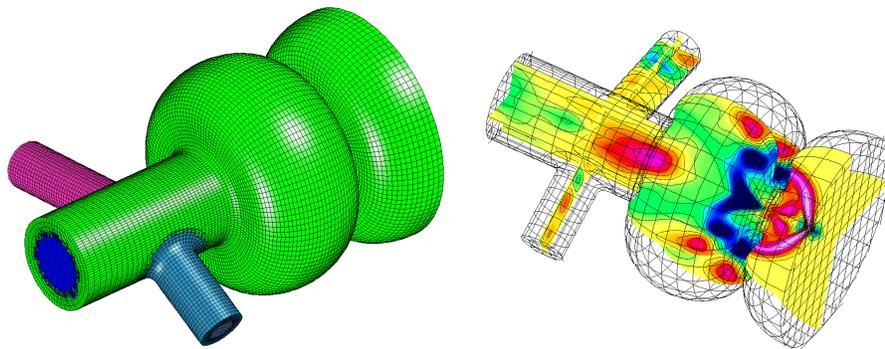


Figure 2. An overlapping grid for the end section of an accelerator cavity and the computed solution ( $E_z$ ) for a moving source charge.

and the numerical boundary conditions (i.e. conditions required by the discrete scheme to define an accurate and stable approximation),

$$p_n = -\mathbf{n} \cdot (\nu \nabla \times \nabla \times \mathbf{u} + \partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}),$$

extrapolate  $\mathbf{t}_m \cdot \mathbf{u}$ ,

where  $\mathbf{n}$  is the outward-normal and  $\mathbf{t}_m$ ,  $m = 1, 2$  are linearly independent tangent vectors at the boundary. See Petersson (2001); Henshaw and Petersson (2003) for a discussion of this boundary condition and the benefits gained from using the curl-curl operator  $\nabla \times \nabla \times \mathbf{u}$  instead of  $\Delta \mathbf{u}$  for implicit time-stepping.

The INS equations can be solved on domains with moving boundaries. Figure 1 shows the overlapping grid and solution from a moving valve computation. At each time-step the component grids associated with the valves are moved and the interpolation points are re-computed. The equations on each grid are solved in the moving coordinate frame associated with the grid. As the grids move there will be some hidden, unused grid-points that become exposed and active. Values for these exposed points are interpolated as discussed in Henshaw and Schwendeman (2006).

### 3. Electromagnetics

The overlapping grid approach has also been applied to the solution of Maxwell's equations. We solve the time-domain equations in second-order form,

$$\begin{aligned} \epsilon \mu \partial_t^2 \mathbf{E} &= \Delta \mathbf{E} + \nabla (\nabla \ln \epsilon \cdot \mathbf{E}) + \nabla \ln \mu \times (\nabla \times \mathbf{E}) - \nabla \left( \frac{1}{\epsilon} \rho \right) - \mu \partial_t \mathbf{J}, \\ \epsilon \mu \partial_t^2 \mathbf{H} &= \Delta \mathbf{H} + \nabla (\nabla \ln \mu \cdot \mathbf{H}) + \nabla \ln \epsilon \times (\nabla \times \mathbf{H}) + \epsilon \nabla \times \left( \frac{1}{\epsilon} \mathbf{J} \right). \end{aligned}$$

A fully fourth-order accurate in space and time approximation has been developed, Henshaw (2006). The advantage of using the second-order form is that there is no need to use a staggered grid. In addition, in many cases only the

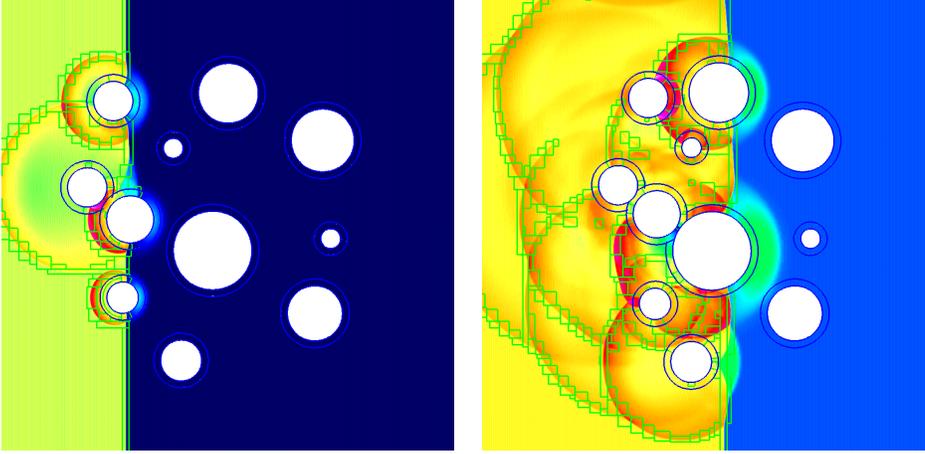


Figure 3. A shock hitting a collection of moving cylinders. Contours of the density is shown along with the boundaries of the base grids (in blue) and the AMR grids (in green). The annular grids around each cylinder can move at every time step. The AMR grids are recomputed every few time steps based on an estimate of the error.

**E** field need be solved for. The spatial approximation uses efficient high-order accurate finite-difference approximations on Cartesian grids and some newly devised high-order accurate symmetric finite-volume approximations for curvilinear grids. The *modified-equation* time-stepping method is used which provides fourth-order accuracy in time while using only three time-levels. In addition, unlike most higher-order time-stepping approaches which require a smaller time-step for stability as the order increases, the time step for the modified-equation scheme does not decrease as the order increases. A key component of the discrete scheme for Maxwell's equations was the development of accurate and stable approximations for boundary conditions and material interfaces. We use high-order *centered* approximations that are derived from the governing equations.

Figure 2 shows results from a computation of a charge source moving through a section of an accelerator cavity. The overlapping grid for this geometry was constructed with the aid of the geometry and CAD capabilities in Overture.

#### 4. Compressible Flows and Adaptive Mesh Refinement

We have developed capabilities to solve the compressible Navier-Stokes equations and reactive-Euler equations. The later equations are given by

$$\frac{\partial \mathbf{u}}{\partial t} + \frac{\partial}{\partial x_1} \mathbf{F}_1(\mathbf{u}) + \frac{\partial}{\partial x_2} \mathbf{F}_2(\mathbf{u}) + \frac{\partial}{\partial x_3} \mathbf{F}_3(\mathbf{u}) = \mathbf{H}(\mathbf{u}), \quad (1)$$

where

$$\mathbf{u} = \begin{bmatrix} \rho \\ \rho \mathbf{v} \\ E \\ \rho \mathbf{Y} \end{bmatrix}, \quad \mathbf{F}_n = \begin{bmatrix} \rho v_n \\ \rho v_n \mathbf{v} + p \mathbf{e}_n \\ v_n (E + p) \\ \rho v_n \mathbf{Y} \end{bmatrix}, \quad n = 1, 2, 3, \quad \mathbf{H} = \begin{bmatrix} 0 \\ \mathbf{0} \\ 0 \\ \rho \mathbf{R} \end{bmatrix}. \quad (2)$$

Here  $\rho$  is density,  $\mathbf{v} = (v_1, v_2, v_3)$  is velocity,  $p$  is pressure,  $E$  the total energy and  $\mathbf{Y}$  the species mass fractions. We solve these equations with a higher-order extension of Godunov's method as described in Henshaw and Schwendeman (2003). We also solve these equations for problems with moving boundaries and adaptive mesh refinement (AMR) as discussed in Henshaw and Schwendeman (2006). Figure 3 shows results from a computation of a shock hitting a collection of rigid cylinders. The figure shows the density of the gas along with the boundaries of the grids at two different times. Each cylinder is evolved by solving the Newton-Euler equations for rigid-body motion with the pressure from the fluid providing the force on the boundaries. An annular grid surrounds each cylinder and this annular grid can move at each time step. Also shown are the AMR grids. There are AMR grids on each annular grid as well as on the background grid. The locations of the AMR grids are recomputed every few time steps based on a error estimator. The approach has been extended to three-dimensions and parallel, Henshaw and Schwendeman (2008). Figure 4 shows the grids and solution for a shock diffracting from a quarter-sphere, computed in parallel. The overlapping base grids are shown as well as the AMR grids. Notice that by using overlapping grids, there are no small cells near the poles of the sphere. On parallel distributed memory computers, each grid (base grid or AMR grid) can be distributed over one or more processors. A modified bin-packing algorithm is used to load-balance and distribute the grids over the processors. The approach was carefully validated using the method of analytic solutions and by estimating the  $L_1$ - and  $L_2$ -norm self-convergence rates for problems such as the quarter-sphere example.

## 5. Conclusions

We have given a brief overview of our work on solving PDEs on overlapping grids. We have attempted to show some of the advantages of this approach for the solution of problems with complex, perhaps moving, geometry. Smooth boundary fitted curvilinear grids and Cartesian background grids enable accurate and efficient finite-difference and finite volume approaches. We have described the solution of the incompressible Navier-Stokes equations using a pressure-velocity formulation. An example of solving an incompressible flow problem with moving valves was shown.

The overlapping grid approach has also been applied to the solution of Maxwell's equations. We solve the time-domain equations in second-order form using an efficient fourth-order accurate method. We use some new high-order accurate and symmetric finite volume approximations as well as high-order accurate centered approximations at boundaries and material interfaces.

We solve high-speed reactive flow problems using adaptive mesh refinement and moving grids. A high-order accurate extension of Godunov's method is

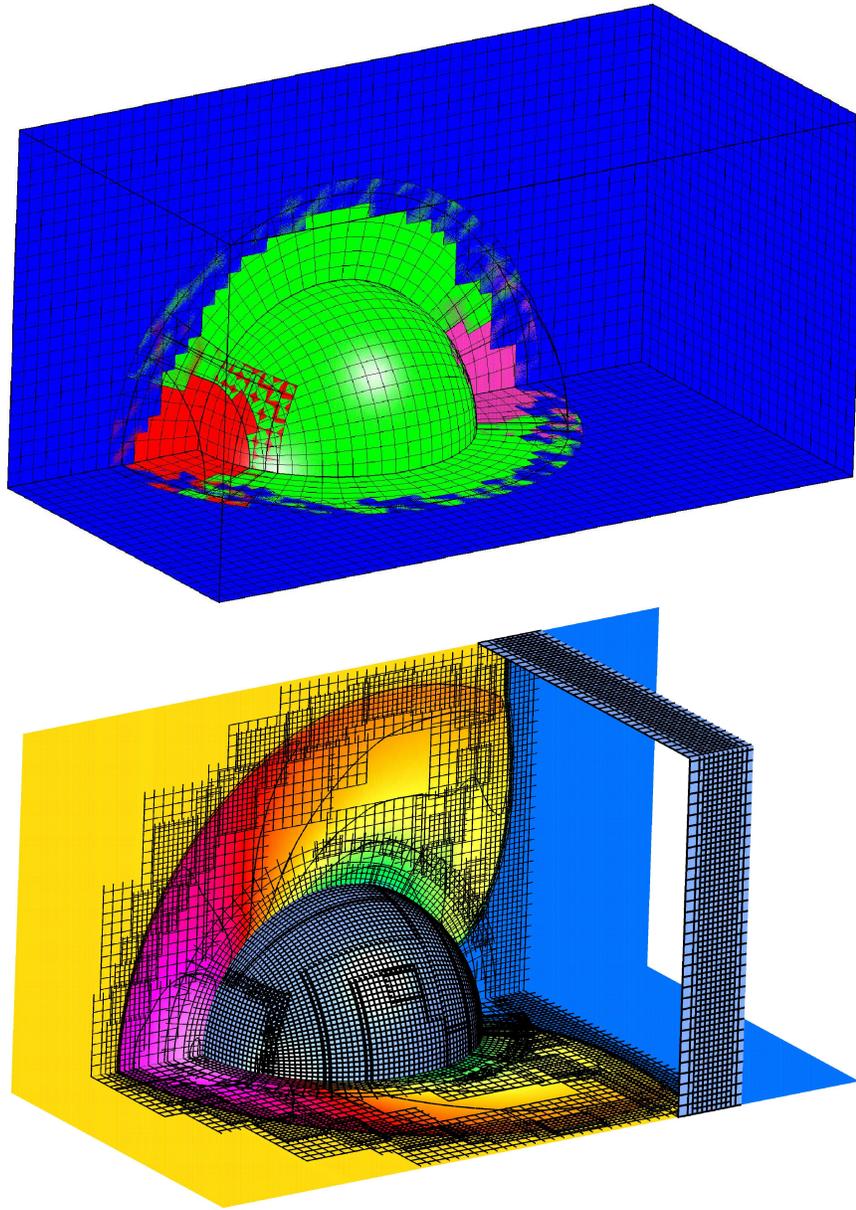


Figure 4. Top: the overlapping grid for the quarter-sphere problem consists of four component grids. Orthographic patches are used at the poles of the sphere to remove the coordinate singularities. Bottom: contours of the density along with the adaptive mesh refinement grids. An incident shock moving from left to right has diffracted around most of the sphere. A reflected shock is also shown. The grid shown is coarsened by a factor of 4.

used to discretize the reactive Euler equations. An example of a shock hitting a collection of rigid moving cylinders was shown. The AMR approach runs in parallel on distributed memory computers.

In current and future work we are developing new approaches for treating multi-domain, multi-physics applications, such as conjugate-heat-transfer and fluid-structure problems, where different PDEs are solved in different domains.

**Acknowledgments.** This work was performed under the auspices of the U.S. Department of Energy (DOE) by Lawrence Livermore National Laboratory in part under Contract W-7405-Eng-48 and in part under Contract DE-AC52-07NA27344 and by DOE contracts from the ASCR Applied Math Program and the ITAPS SciDAC Center.

## References

- Cheshire, G. and Henshaw, W. (1990). Composite overlapping meshes for the solution of partial differential equations. *J. Comput. Phys.*, **90**(1), 1–64.
- Henshaw, W. (1994). A fourth-order accurate method for the incompressible Navier-Stokes equations on overlapping grids. *J. Comput. Phys.*, **113**(1), 13–25.
- Henshaw, W., Kreiss, H.-O., and Reyna, L. (1994). A fourth-order accurate difference approximation for the incompressible Navier-Stokes equations. *Comput. Fluids*, **23**(4), 575–593.
- Henshaw, W. D. (2006). A high-order accurate parallel solver for Maxwell’s equations on overlapping grids. *SIAM Journal on Scientific Computing*, **28**(5), 1730–1765.
- Henshaw, W. D. and Petersson, N. A. (2003). A split-step scheme for the incompressible Navier-Stokes equations. In M. Hafez, editor, *Numerical Simulation of Incompressible Flows*, pages 108–125. World Scientific.
- Henshaw, W. D. and Schwendeman, D. W. (2003). An adaptive numerical scheme for high-speed reactive flow on overlapping grids. *J. Comput. Phys.*, **191**, 420–447.
- Henshaw, W. D. and Schwendeman, D. W. (2006). Moving overlapping grids with adaptive mesh refinement for high-speed reactive and non-reactive flow. *J. Comput. Phys.*, **216**(2), 744–779.
- Henshaw, W. D. and Schwendeman, D. W. (2008). Parallel computation of three-dimensional flows using overlapping grids with adaptive mesh refinement. *J. Comput. Phys.*, **227**(16), 7469–7502.
- Meakin, R. L. (1999). Composite overset structured grids. In J. F. Thompson, B. K. Soni, and N. P. Weatherill, editors, *Handbook of Grid Generation*, chapter 11, pages 1–20. CRC Press.
- Petersson, N. A. (2001). Stability of pressure boundary conditions for Stokes and Navier-Stokes equations. *J. Comput. Phys.*, **172**(1), 40–70.