LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

LLNL-CONF-662797

Inline Modeling of Cross-Beam Energy Transfer and Backscatter in Hohlraums

D. J. Strozzi, S. M. Sepke, G. D. Kerbel, P. Michel, M. M. Marinak, L. Divol, O. S. Jones

October 16, 2014

APS DPP
New Orleans, LA, United States
October 26, 2014 through October 31, 2014

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

Inline Modeling of Cross-Beam Energy Transfer and Backscatter in Hohlraums

D. J. Strozzi, S. M. Sepke, G. D. Kerbel, P. Michel,
M. M. Marinak, L. Divol, O. S. Jones
Lawrence Livermore National Lab

56th APS DPP Meeting
29 October 2014

This work performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344

Cross-beam energy transfer (CBET) is needed for round implosions in gas-filled hohlraums

- Transfer to beam with lower frequency in plasma rest frame
- Determined by plasma flow and laser wavelengths
- NIF: 3 wavelengths ("colors") for 23°, 30°, and outer cones
- Round implosions need transfer to inners:
  $\lambda_{in} - \lambda_{out} \sim$ 5-10 Å @ 1ω on cryo gas-filled shots

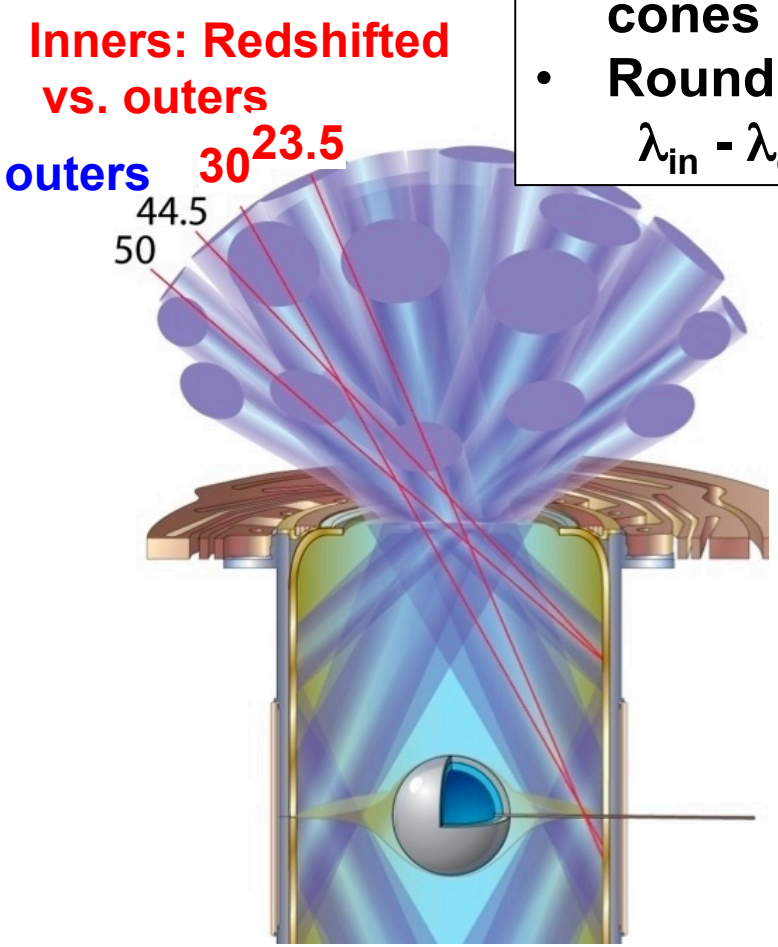

Summary: Hydra[1] inline CBET model is applied to gas-filled NIF hohlraums with large transfer

- **Script process:**
  - **Straight rays, no inverse brem. absorption, used to date for NIF designs**
  - **Gives more CBET than experiments -> δn saturation clamp**

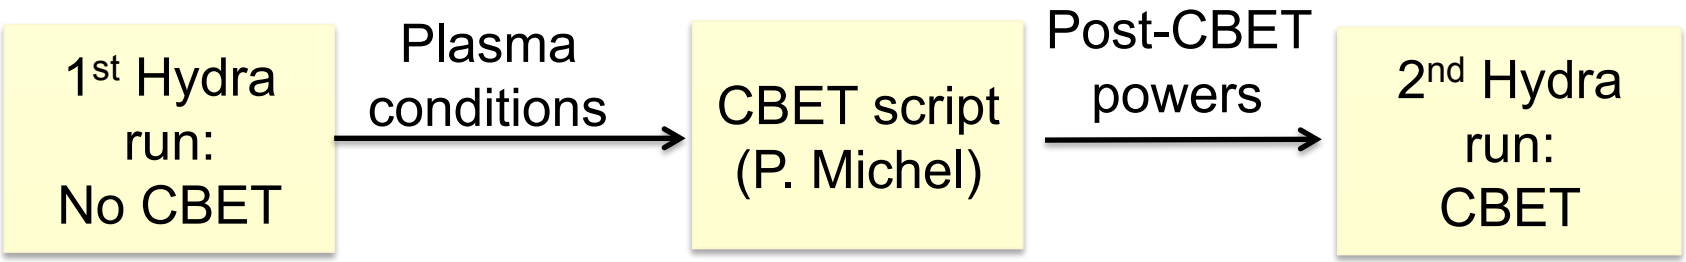

- **Inline model[2]: Hydra calculates CBET every time step**
  - **Same linear, kinetic coupled-mode equations as script**

- **Inline model advantages vs. script:**
  - **One Hydra run, not two**
  - **More physics: refraction, inverse brem. absorption, spatially non-uniform transfer**
  - **Ion wave energy and momentum deposition:**

    May limit CBET[4], reduce need for δn saturation clamp

---

[1]M. M. Marinak et al., PoP 2001; [2]M. M. Marinak et al., APS-DPP 2012
[3] P. Michel et al., PoP 2010; [4]P. Michel et al., PRL 2012

Physics results

- Early-time picket:
  - Inline model agrees with script, once inners burn through LEH plasma
  - Before, plasma dense and cold, inverse brem. (neglected by CBET script) matters

- Peak power:
  - Inline model converges to script result – with enough numerical rays
  - Inline ion-wave energy deposition heats LEH ions, little effect on transfer

NIF shot N131118:
Laser Power vs. Time

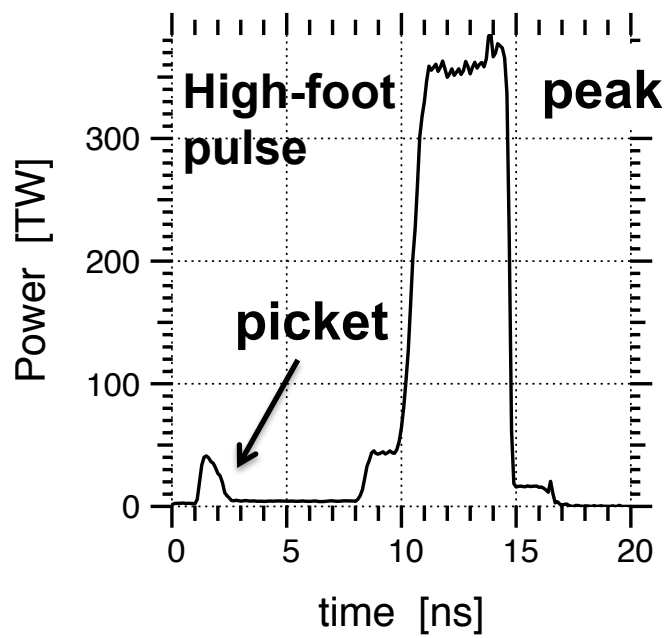

CBET model uses coupled-mode equations for unpolarized beams: NIF quad-to-quad transfer

$$\frac{dI_1}{dz} = g * \min\left[I_0 I_1, a\,\delta n_{\max}\sqrt{I_0 I_1}\right] \qquad g = \text{coupling coeff}$$

$$\frac{dI_0}{dz} = -\frac{\omega_0}{\omega_1}\frac{dI_1}{dz} \qquad \text{Manley-Rowe}$$

beams 0 and 1

Laser polarization angles random and uncorrelated
CBET w/ polarized beams: P. Michel, talk PO4.13 Wed. PM

$$\delta n \propto \min\left[\sqrt{I_0 I_1}, \delta n_{\max}\right]$$

$$K = \frac{\chi_e(1+\chi_i)}{1+\chi_e+\chi_i}$$

- **Strongly damped ion waves**
- **Saturation clamp δn_{max}**

Uses kinetic Z - function at ion wave $(\omega, \mathbf{k}) = (\omega_0 - \omega_1, \mathbf{k}_0 - \mathbf{k}_1)$

Ion-wave momentum and energy deposition:

$$m_i \frac{d\langle \vec{v}_i \rangle}{dt} = -\alpha \vec{k}$$

$$\frac{dT_i}{dt} = \frac{2}{3}\left(\omega - \vec{k} \bullet \langle \vec{v}_i \rangle\right)\alpha$$

$$\alpha \equiv \frac{|E_k|^2 \operatorname{Im}\chi_i}{8\pi n_i}$$

P. Michel et al., PRL 2012

CBET along HYDRA ray found using zonal intensity: sum of all rays in a zone

In HYDRA, rays carry power, intensity is a *zonal* quantity

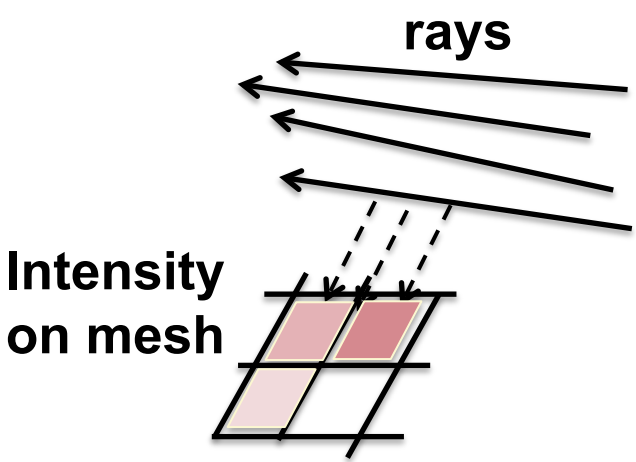

- **Transfer is done along rays, based on zonal intensity**
- **Enough numerical rays needed to resolve intensity**
- **Manley-Rowe not exactly satisfied**
- **Numerically iterate until CBET power loss < tolerance * incident power**

Picket: inline model gives less transfer than script

Picket cone fraction vs. time

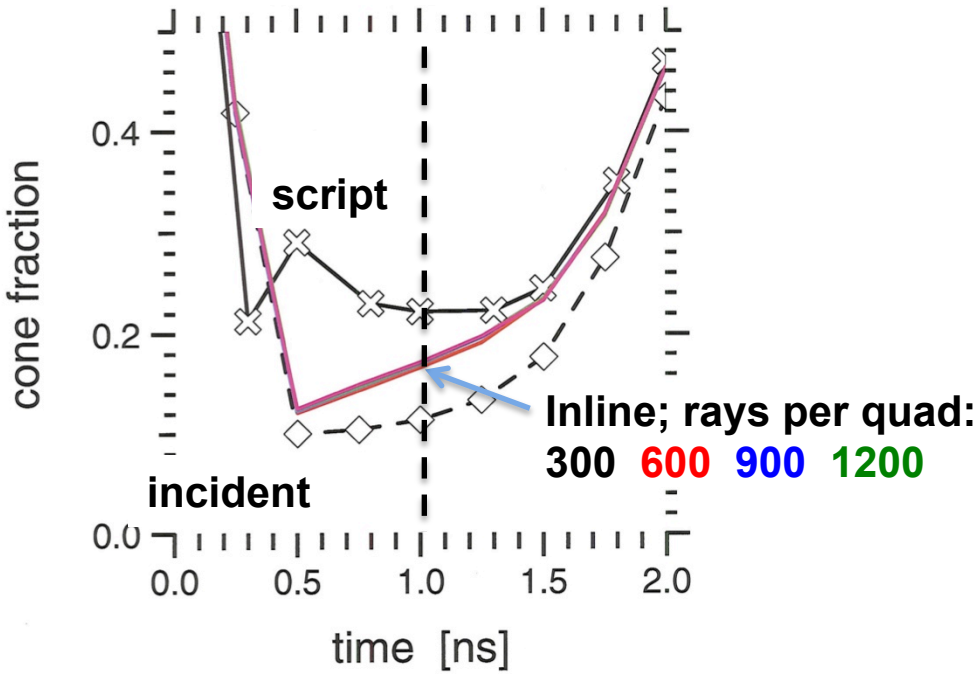

Laser picket power vs. time

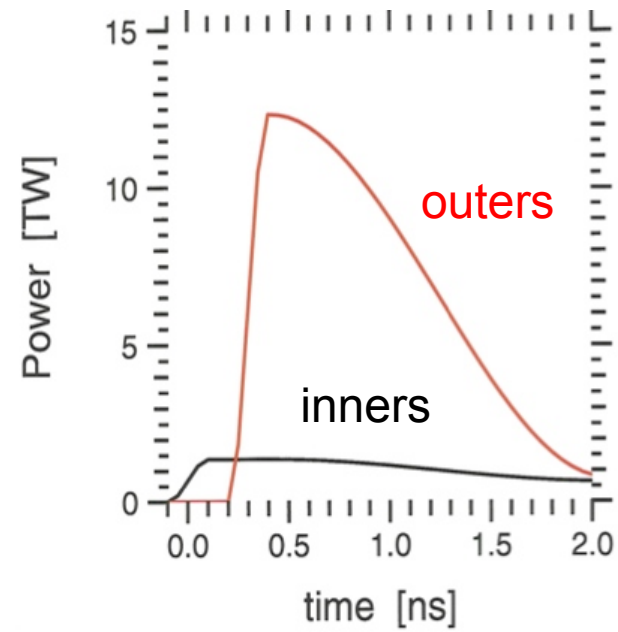

Before 1 ns:

- Inline model gives less transfer
- Inners absorbed in dense, cold LEH plasma
- X-ray flux symmetry on capsule similar

Afer 1 ns:

- Inners propagate through LEH
- Script and inline model agree

- Generic low-foot pulse
- Moderate CBET:
  $\lambda_{in} - \lambda_{out} = 3.5$ Å
- Saturation clamp $\delta n_e/n_e = 6*10^{-4}$

Cone fraction = Inner / total power

Peak power: inline CBET converges to script results with more numerical rays: intensity better resolved

Peak power cone fraction vs time

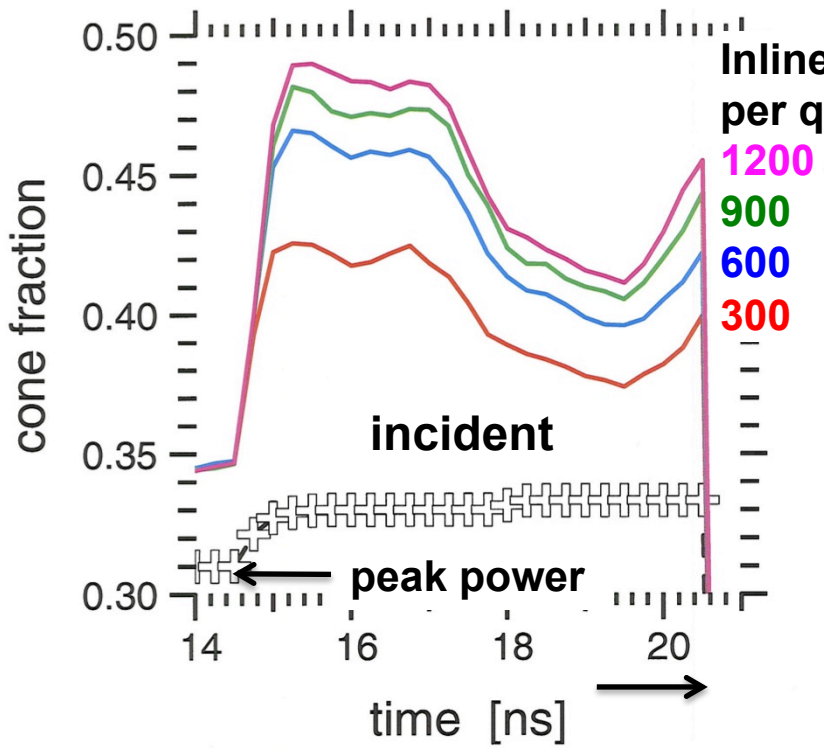

Inline cone fraction converges to script

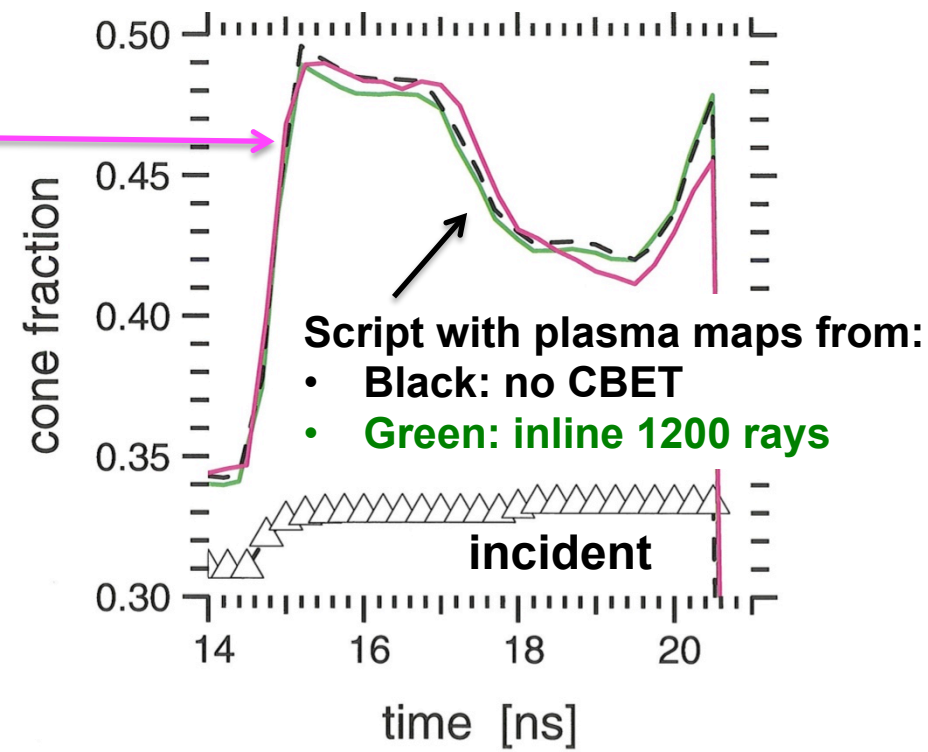

- Generic low-foot pulse
- Moderate CBET:
  $\lambda_{in} - \lambda_{out} = 3.5$ Å
- Saturation clamp $\delta n_e/n_e = 6*10^{-4}$

- Magenta and green curves agree: Script and inline model give same transfer on same plasma maps
- Black and green curves agree: Script gives same transfer on plasma maps with and without CBET: no need to iterate script

Peak power: inline ion-wave energy deposition has little effect on transfer

N131118: high-foot 2D ConA
E_{laser} = 1.71 MJ
$(\lambda_{23}, \lambda_{30}) - \lambda_{out}) = (8.2, 7.5)$ Å @ 1ω
CH capsule, He gas fill
Saturation clamp $\delta n_e/n_e = 10^{-3}$

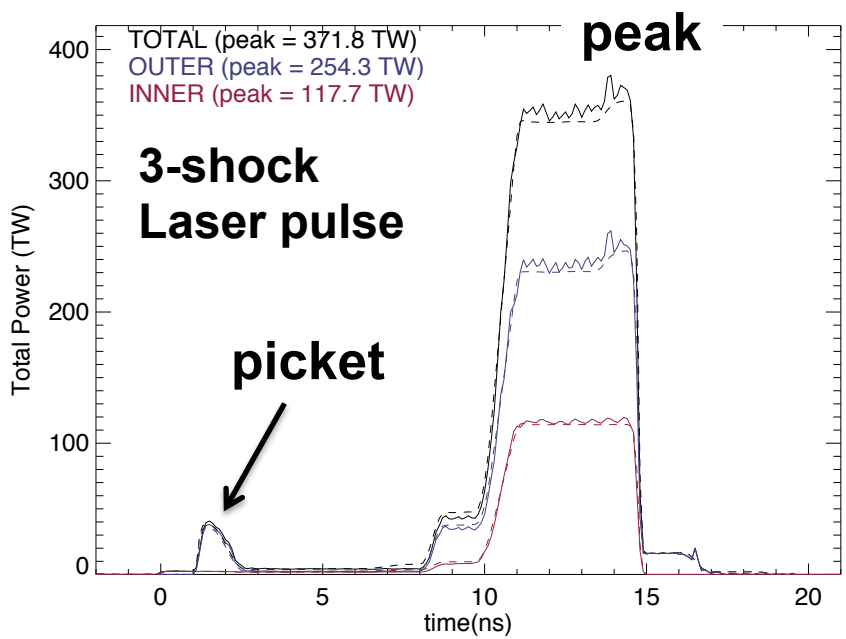

Cone fraction:
inner / total power

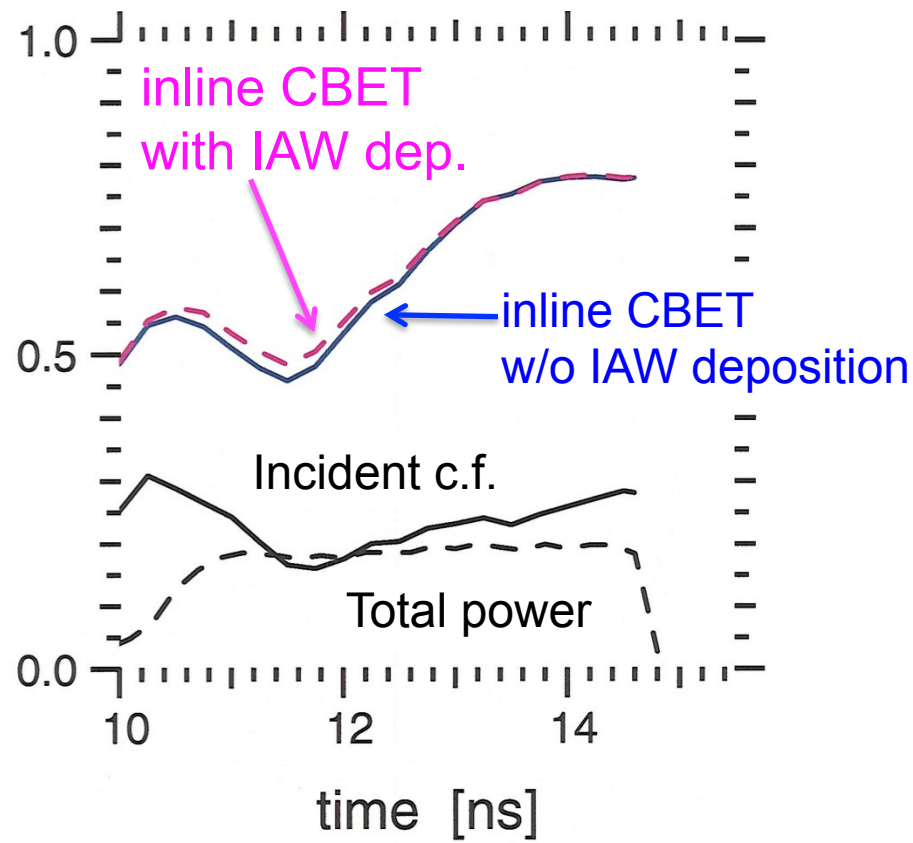

Peak power: CBET without ion deposition changes ion temperature via cone fraction

High-foot shot N131118

T_{ion} [keV] @ 14 ns: late peak power

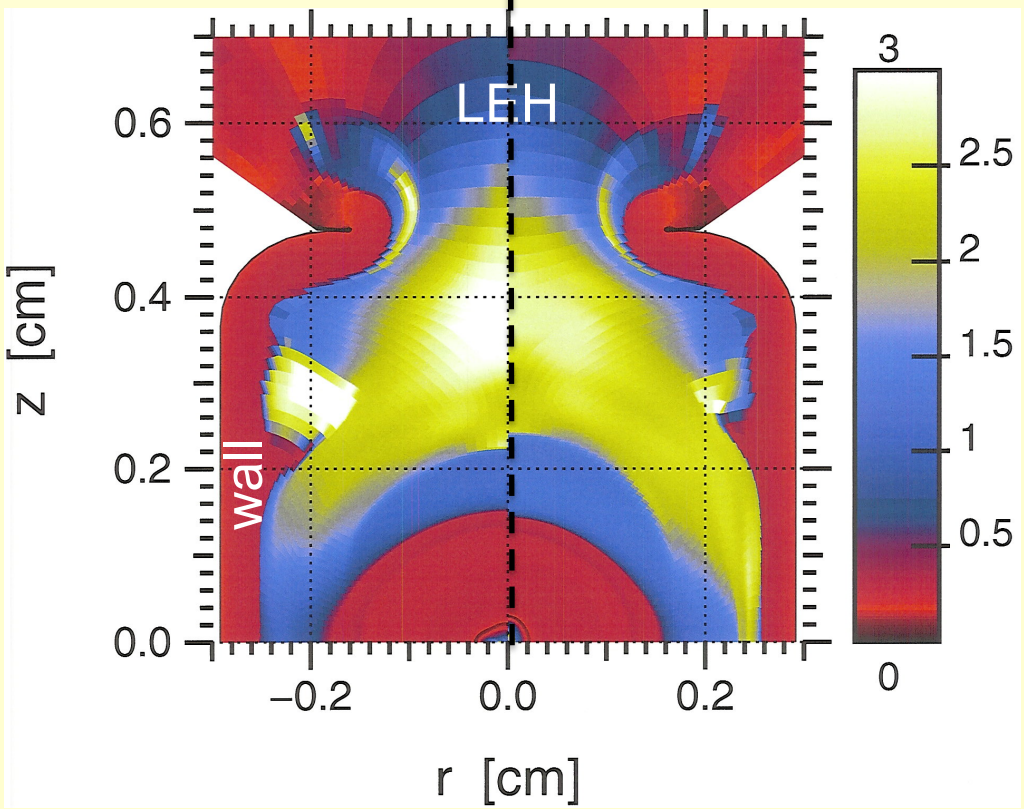

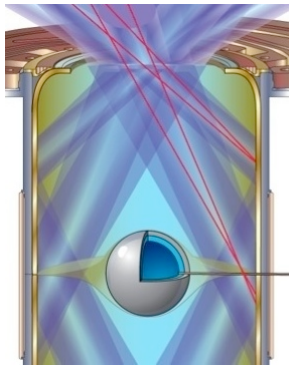

T_{ion} [keV]
CBET – No CBET

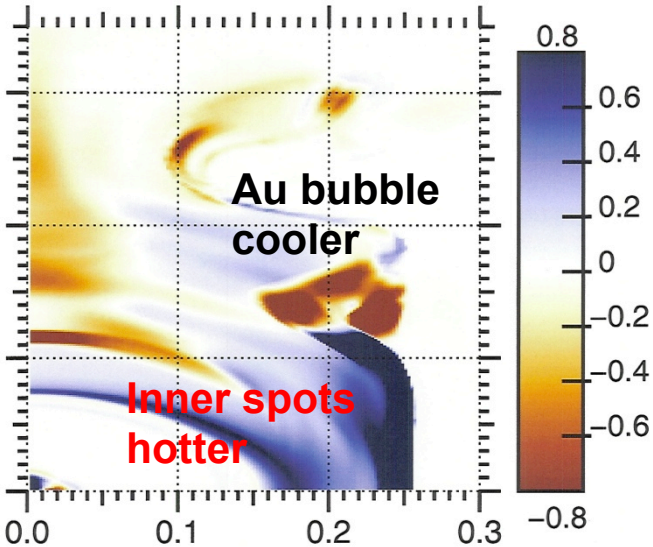

Peak power: CBET with ion-wave deposition heats LEH ions – little effect on transfer

High-foot shot N131118

Inline CBET T_{ion} [keV] @ 14 ns: late peak power

Without ion-wave deposition | With ion-wave deposition

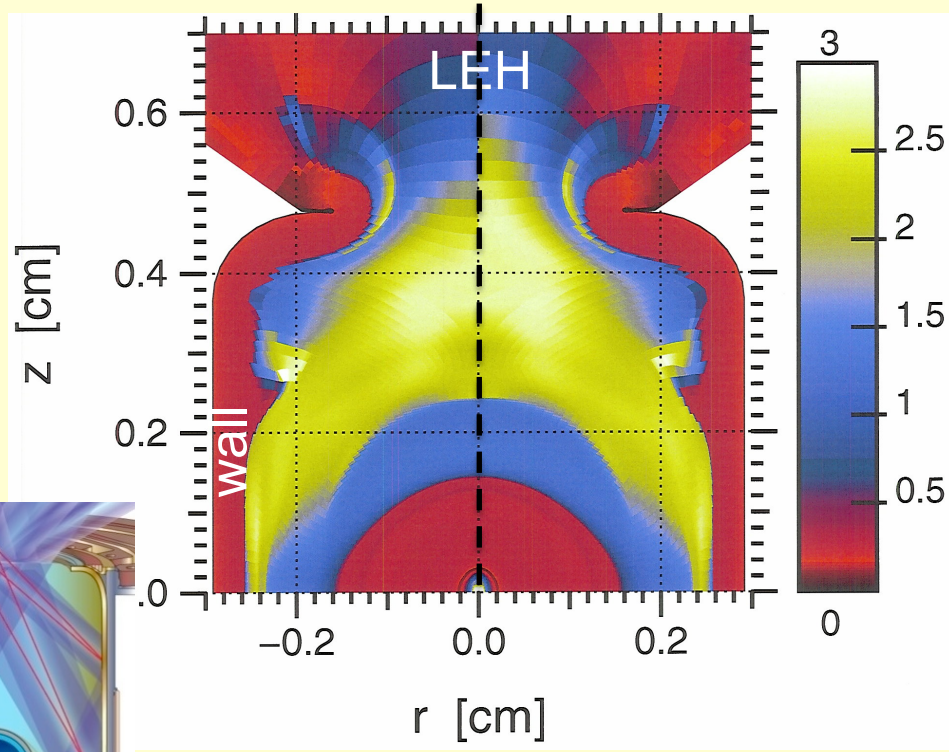

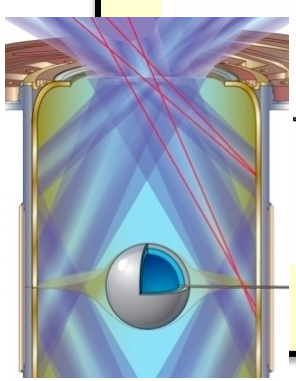

T_{ion} [keV]
IAW dep – No IAW dep

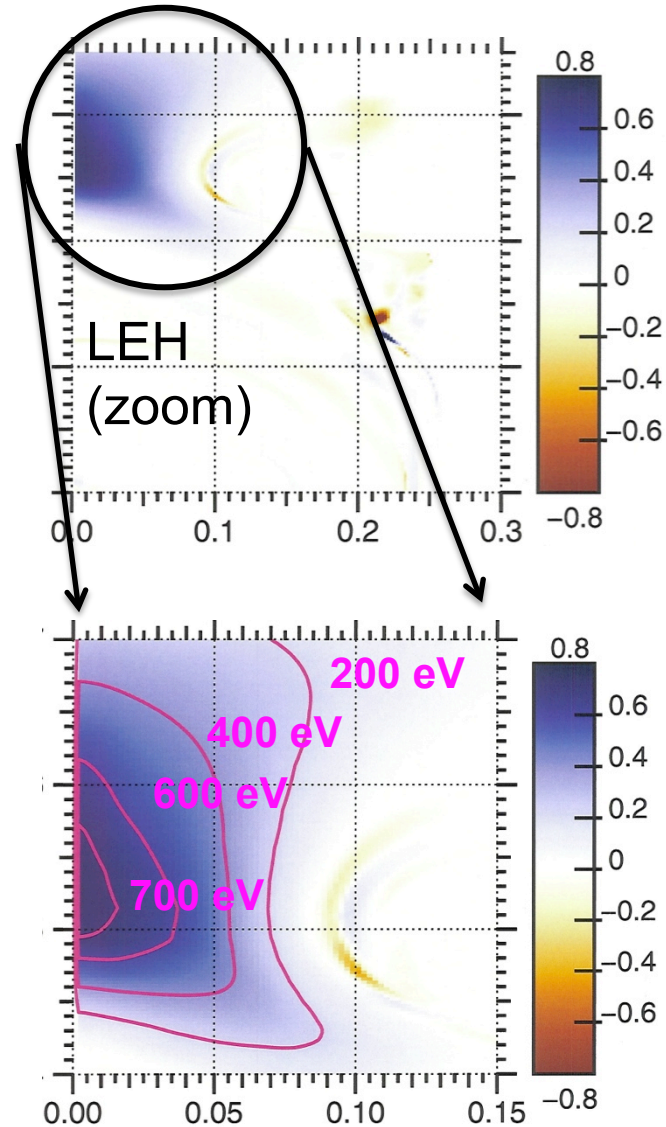

Hydra inline CBET model works, being extended to include Raman backscatter

- Picket: Inline model agrees with script once inners burn through LEH
- Peak power:
  - — Inline model agrees with script, with enough numerical rays
  - — Inline ion-wave energy deposition has little effect on transfer

- Backscatter also heats LEH, impairs inner-beam propagation more than reducing incident laser power

- Similar inline models under development in Lasnex (D. Bailey)

Teaser:
inline SRS on 1D profile

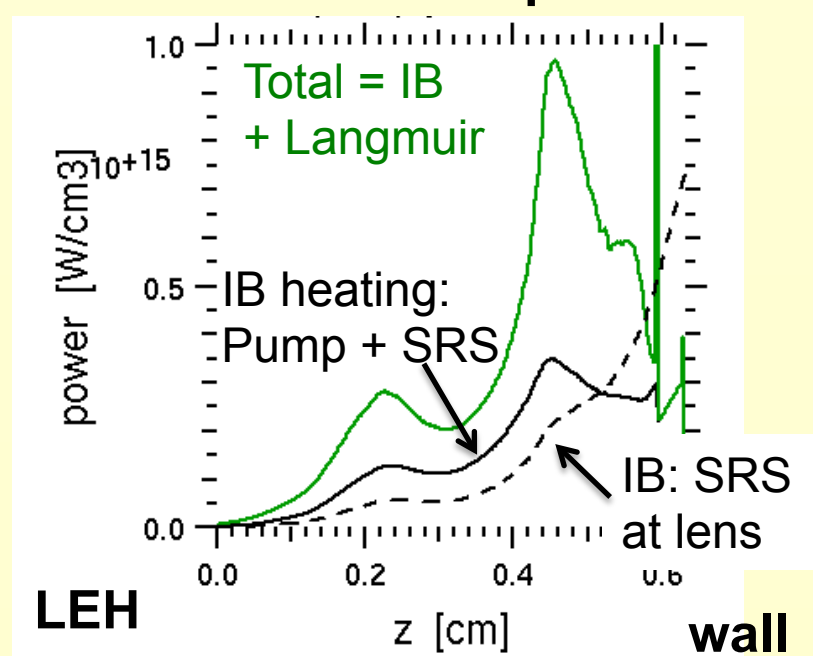

NIF

- BACKUP
- BELOW
- HERE

Picket: script and inline models both give large CBET, differ in details

NIF High-foot Shot N131118

Incident power:
Inners burn through window to avoid hot electrons

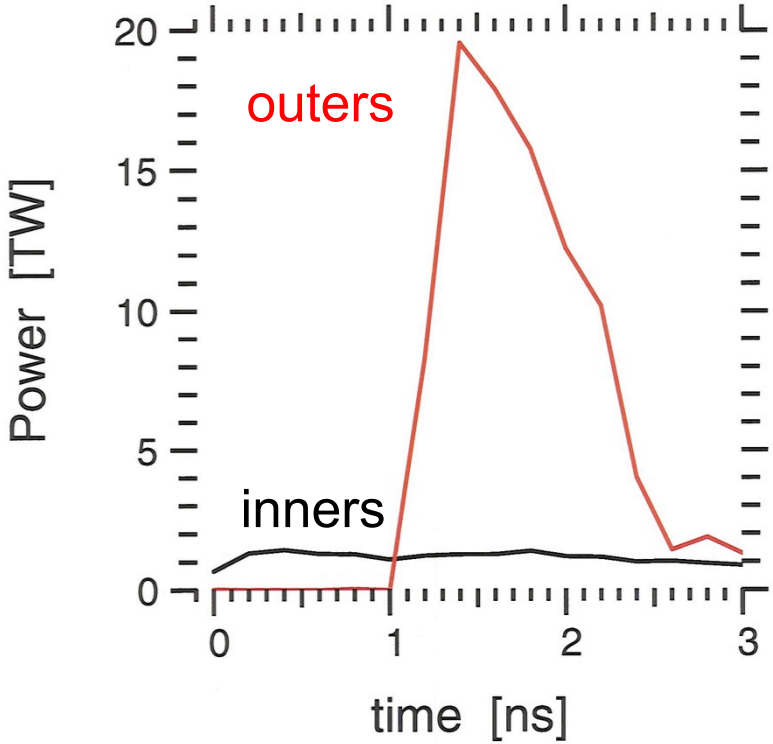

Cone fraction:
inner / total power

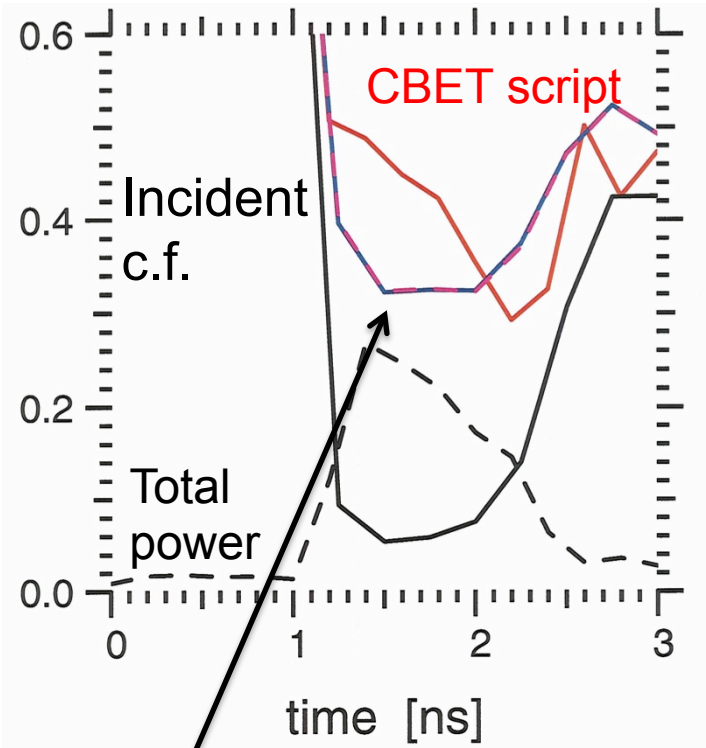

inline CBET results: curves overlap
blue: no IAW deposition
dashed magenta: yes IAW dep.

Peak power: x-ray flux moments on capsule behave like cone fraction, inline converges to script

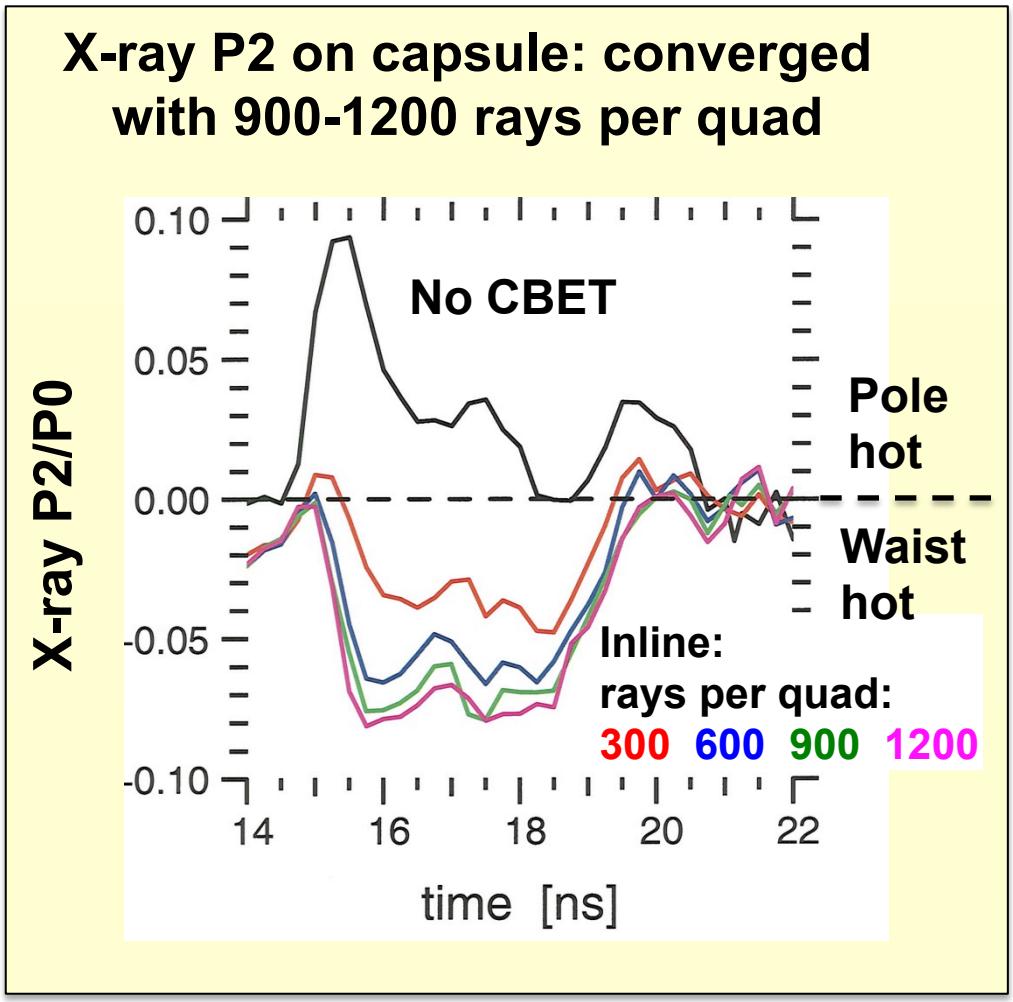

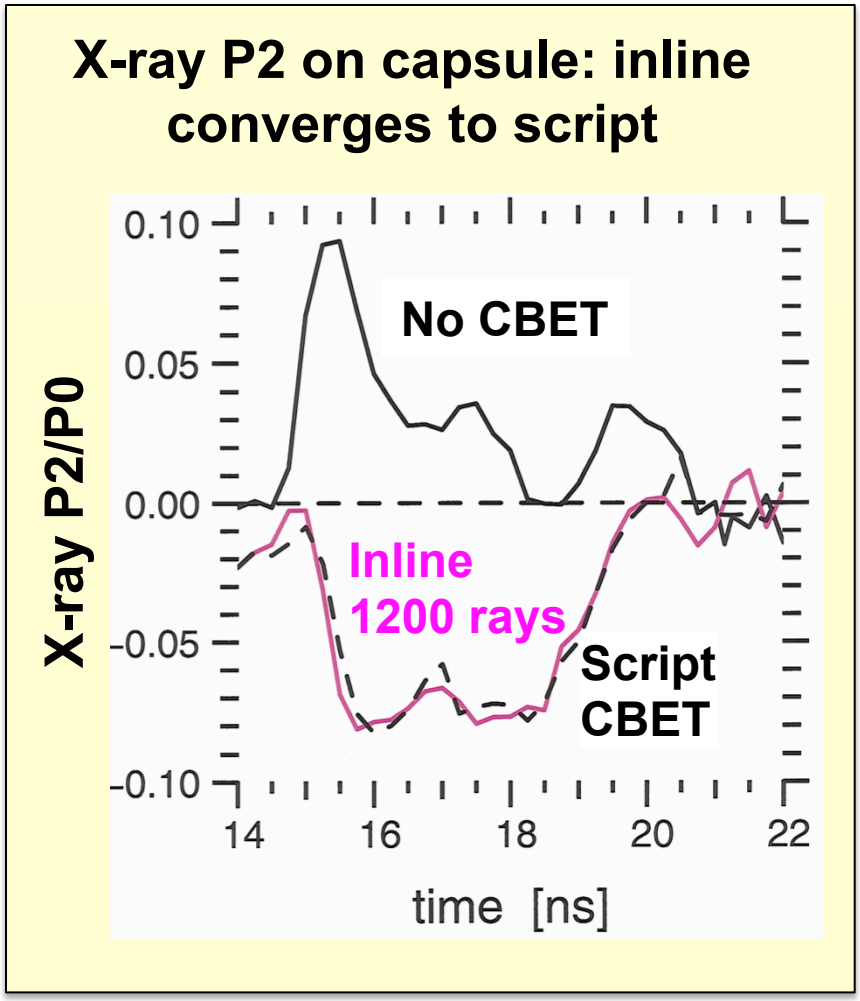

- 2D ConA shots and hot-spot self-emission measure capsule P2/P0 to < 5%
- P2/P0 <~ 2% in peak required for ignition (A. Kritcher)

Details of model as run for this talk

- **Exponential model with Manley-Rowe cap:**

$$\frac{dI_1}{dz} = GI_1 \quad G \propto I_0 \quad \longrightarrow \quad P_{ray,1}(\text{end}) = P_{ray,1}(\text{begin})\exp[G]$$

Beam 1, unsaturated case

  — **Intensity of other beam updated separately: pump depletion occurs over numerical iterations**
  — **Manley-Rowe cap: ray can't gain more power than available from all beams transferring to it**

- **Beam k vector found by intensity-weighting rays in a zone: can change from value at lens due to refraction**

- **Numerically iterate, max of 10 times, til power lost due to CBET (Manley-Rowe violation) < 10^{-4} * incident power**

Cone fraction: inner / total power

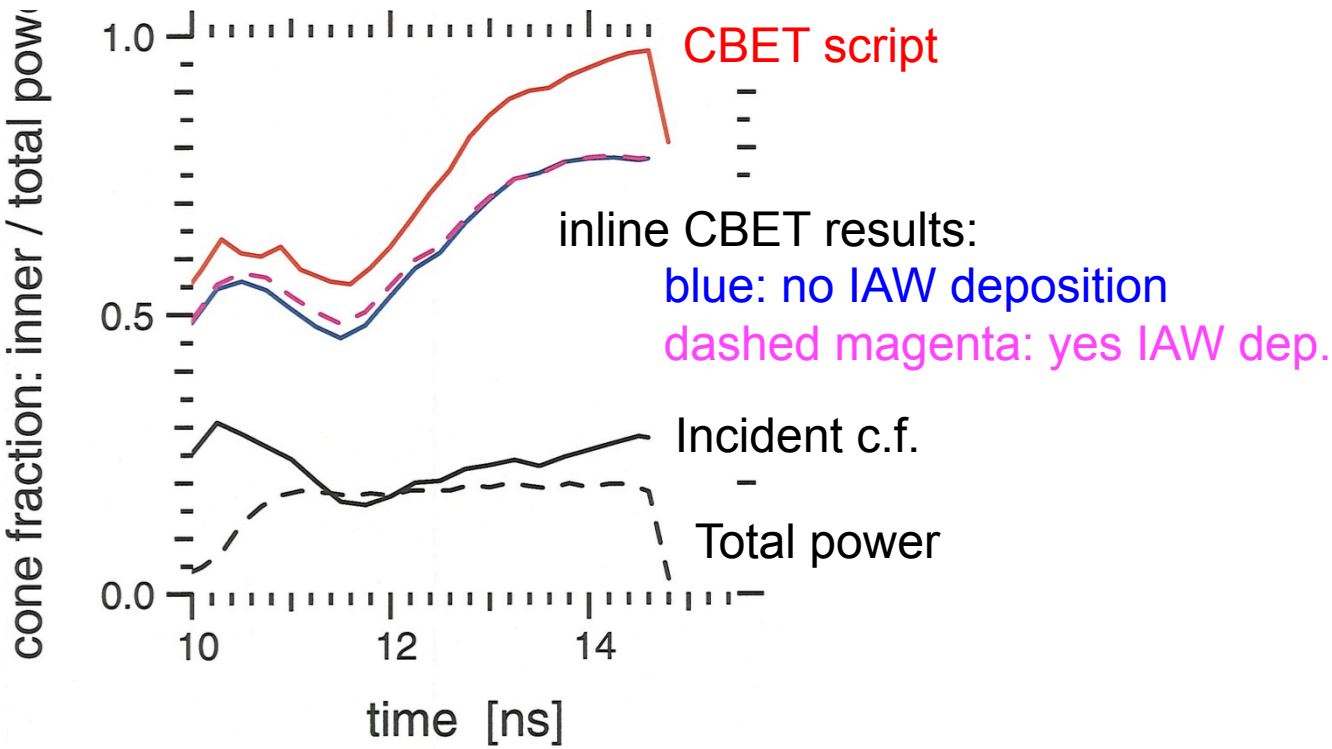

The 4 C's of coding

- Correctness – are the desired equations being solved?
  - — Yes: comparisons with Python coupled-mode solutions (S. Sepke)
- Crash? Model runs without crashing
- Conservation – is power error acceptable? Yes
- Convergence – do physical answers like flux moments and capsule shape change with numerics, e.g. zoning, rays?

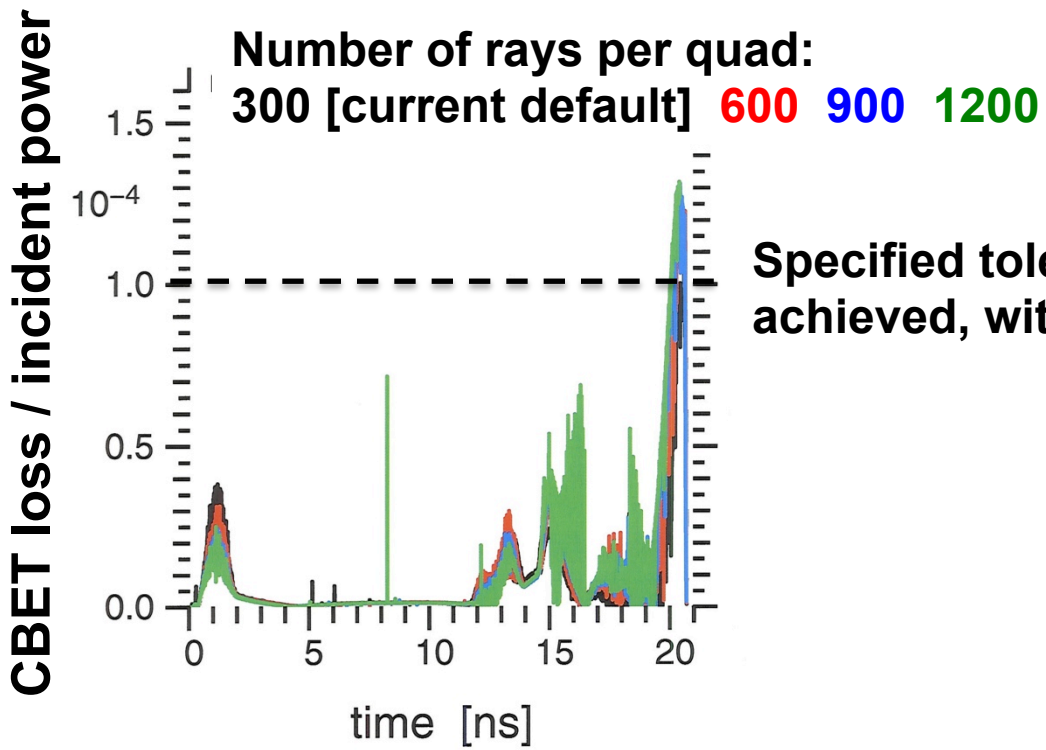

Specified tolerance of 10^{-4} almost always achieved, with <= 10 iterations

The inline Hydra model includes effects beyond the offline script

CBET script method (P. Michel):

- Hydra "pre-transfer" run: no CBET, no backscatter, no drive multipliers
- CBET script run on pre-transfer plasma conditions
- Hydra "post-transfer" run with incident cone powers modified according to script

Additional physics in inline CBET model:

- Inverse brem. absorption
- Ray refraction
- Spatially non-uniform transfer: both along beam propagation direction and transverse to it
- Momentum and energy deposition by CBET-driven ion waves, may limit CBET[1]: under development

- Inline model only uses a single Hydra run, with increased computer resources for laser propagation

[1] P. Michel et al., PRL 109, 195004 (2012)

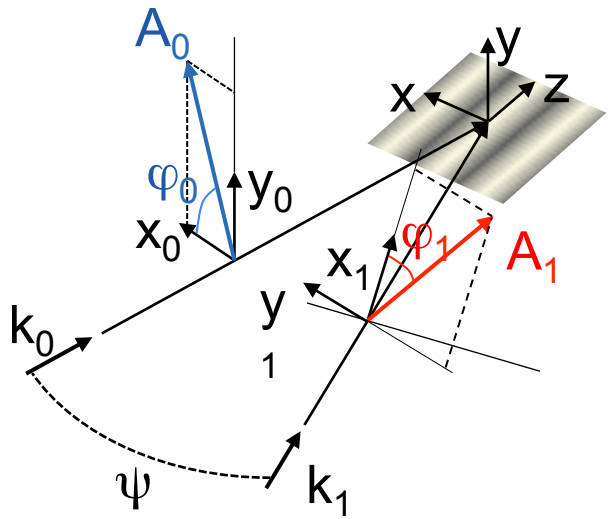

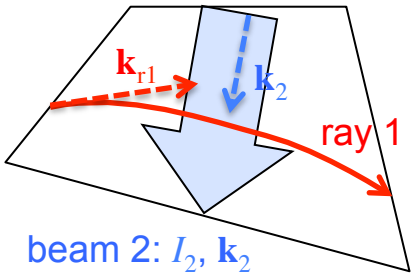

beam 2: I_2, $\mathbf{k}_2$
averaged over all rays

$$I = \sum_{r=1}^{Nrays} P_r \frac{s_r}{\Delta V}, \quad P_r = \frac{1}{s_r}\int_0^{s_r} ds' P(s')$$

s_r = distance of ray through zone

Coupling coeff from formula page:

$$\frac{\pi r_e}{2\omega_0 m_e c^2}\frac{k^2}{k_0 k_1}\left[1+\cos^2(\psi)\right]\mathrm{Im}(K)$$

Script gives slightly less transfer than Re-emit shot data[1]

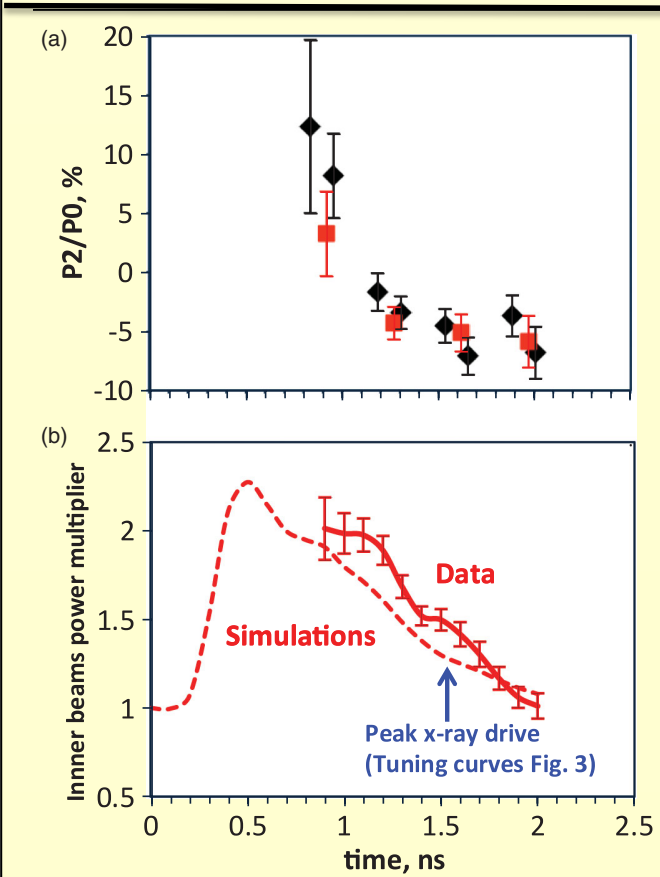

[1]E. L. Dewald, J. L. Milovich et al., PRL 2013